



Parking Garage and Canopy

americanlite[®]

We light your world[™]





Americanlite® legacy continues with APG™ Series, the most advanced garage fixture in the market. The APG™ Series provides effective solutions for meeting the dynamics and challenges of parking garage applications including IES recommendations. We have created the most versatile garage fixture, with 4 adjustable side lenses to address the light where you need it, reducing the total amount of fixtures compared to conventional garage fixtures.

The Central lens (160 beam), reduces glare providing exceptional visual comfort and performance, The 4 optics with a 120° tilt angle, provide the ability to control the spread and increase the lumen x sqf, making the APG™ Series the ideal solution for parking garage and canopy applications.


Rugged die-cast aluminum construction and gasketed housing make the APG™ luminaire virtually impenetrable to contaminants (Wet location / IP65 rated). Integrated heatsink fins and isolated power supply compartment allows cooler operation and maximum LED operating life. Impact resistant clear prismatic polycarbonate lens (UL746C recognized) provides uniform light distribution. 1-10V UL dimming driver, a SPD up to 4KV and a wide range 100-277v. combining the latest LED technology (Lumileds) and options such as Motion Sensor makes APG™ luminaire a strong and versatile fixture, ready for high performance and energy savings.

The APG™ luminaire mounts to a recessed junction box or surface mount with 4 (1/2") conduit entry points. Can be pendant mounted with NPT pendant stem provided by others.


The APG™ luminaire provides years of maintenance-free garage illumination applications.

Dimensions (mm)

4 Rotating heads <120°

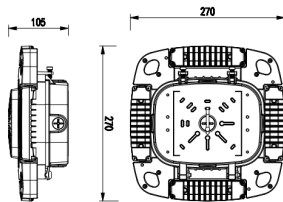

with ER Driver

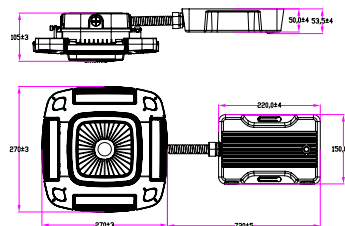

Ordering information


Model	Power	Lumens	CCT	Options
AL574489	35w	4550	Blank 5000K	MS Motion Sensor (MC612VDRC)
AL574490	55w	7150	57 5700K	RC Remote control (MH02)
			4 4000K	E1 15w ER driver (BLD-CM20E-480800)
			3 3000K	

Notes

- Surge Protection: 4kV for 55w, 2kV for 35w
- Housing wall thickness: >1.2mm
- Salt chamber test: 168 hours

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
35w /55w	2	32 x 30.5 x 33	0.0322	5.8

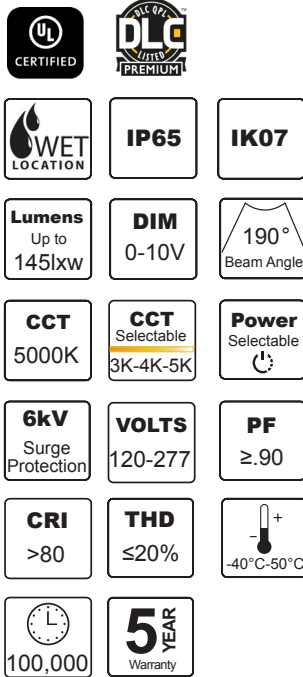

Americanlite® Canopy LED fixtures are built to withstand rugged outdoor environments and operate in all weather conditions while providing bright, reliable light.




The TPG™ luminaires provide a seamless blend of performance, visual comfort, and accessory options in an elegant profile design to enhance the environment in which they occupy.

Rugged die-cast aluminum construction and gasketed housing makes the TPG™ luminaire virtually impenetrable to contaminants, wet location / IP65 rated, and resistant to impact too, with IK07 certification. Integrated heatsink fins and isolated power supply compartment allows cooler operation and maximum LED operating life. Impact resistant prismatic polycarbonate lens provides uniform light distribution. Lumileds 2835 LED technology and state of the art UL dimming driver 0-10V, 120-277V with up to 6KV surge protection.

TPG™ luminaire gives you more, with optional CCT and Power Selectable, the latest in Microwave and PIR sensors resulting in a versatile fixture, ready for high performance and energy savings. The TPG™ luminaire mounts to a recessed junction box or surface mount with conduit entry points. Can be pendant mounted with NPT pendant stem provided by others.

The TPG™ Series provides years of maintenance-free illumination for outdoor applications. Ideal for gas stations, entrances, parking areas, covered walkways, loading docks schools, gymnasiums, and much more.

Dimensions (mm)

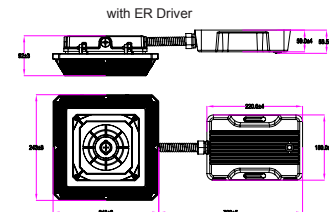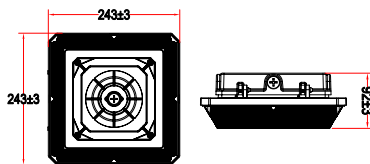

Ordering information

Model	Power	Lumens	CCT	Options
AL674423	45w	6300	Blank	5000K
AL674424	60w	8400	57	5700K
AL674425	75w	10500	4	4000K
AL674426	90w	12600	3	3000K

CCT Select / Power Select			
Model	Power	Lumens	CCT
AL674427	45w/30w/20w	6300/4200/2800	3K/4K/5K
AL674428	60w/50w/40w	8400/7000/5600	3K/4K/5K
AL674429	75w/60w/40w	10500/8400/5600	3K/4K/5K

AL574327 Remote Control (HB03R)

Notes

- Lumen Tolerance ± 10%
- Lumens based on 5K
5K/57K=140 l/w
4000K=145 l/w
3000K=130 l/w
- Surge Protection:
45w/60w = L/N-PE: 2.5kV, L-N: 2.5kV
75w = L/N-PE: 4kV, L-N: 4kV
90w = L/N-PE: 6kV, L-N: 4kV
- Drivers:
45w/60w = Daermay brand
75w= Becky Brand
90w= Fahold Brand
- Housing wall thickness: >1.2mm
- Salt chamber test: 168 hours
- 100,000 Hours @ <60° TC

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
45w / 60w / 75w / 90w	8	54 x 30 x 58	0.09396	19



Americanlite® Canopy LED fixtures are built to withstand rugged outdoor environments and operate in all weather conditions while providing bright, reliable light.



The SPG™ luminaires provide a seamless blend of performance, visual comfort and accessory options in an elegant profile design to enhance the environment in which they occupy.

Rugged die-cast aluminum construction and gasketed housing makes the SPG™ luminaire virtually impenetrable to contaminants (Wet location / IP65 rated). Integrated heatsink fins and isolated power supply compartment allows cooler operation and maximum LED operating life. Impact resistant clear prismatic polycarbonate lens (UL746C recognized) provides uniform light distribution. State of the art UL dimming driver 0-10V, with 6KV surge protection and a wide range 120-277v.

SPG™ luminaire combines the latest LED technology (Lumileds) and option of motion sensor resulting in a versatile fixture, ready for high performance and energy savings. The SPG™ luminaire mounts to a recessed junction box or surface mount with 4 (1/2") conduit entry points. Can be pendant mounted with NPT pendant stem provided by others.

The SPG™ Series provides years of maintenance-free illumination for outdoor applications. Ideal for gas stations, entrances, parking areas, covered walkways, loading docks schools, gymnasiums, and much more.

Dimensions (mm)

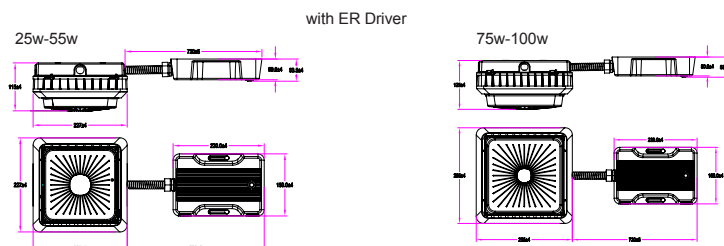

Lumens Matrix

Power	3000K L/W	4000K L/W	5000K L/W	5700K L/W
25w	126	128	129	131
40w	126	128	129	131
50w	130	132	133	134
75w	130	132	133	135
100w	130	132	135	138

Ordering information

Model	Power	Lumens	CCT	Options
AL674416	25w	3275	Blank 5000K	MS Motion Sensor (MC605V/D) E1 15w ER driver 25-55w (BLD-CM20E-480800) 75-100w (BLD-CM20H-1500400)
AL574496	40w	5160	57 5700K	
AL574497	55w	7315	4 4000K	
AL574498	75w	9975	3 3000K	
AL574499	100w	13500		

Notes

- Lumen Tolerance ± 10%
- Surge Protection 25w/40w/55w = 4KV
- NO DLC for 3000K
- Housing wall thickness: >1.2mm
- Salt chamber test: 168 hours

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
25w 40w 55w	4	56 x 37 x 30	0.0621	9.6
75w/100w	2	39 x 32 x 33	0.0411	6.6
With Driver for 55w	4	55 x 44 x 29.5	0.0714	12.5



DPG™

20w/35w/40w/60w/75w

CCT & Power Selectable

	IP65	IK10
Lumens Up to 141lxw	DIM 0-10V	 160° Beam Angle
CCT 5000K	CCT Selectable 3K-4K-5K	Power Selectable
6kV Surge Protection	VOLTS 120-277	PF ≥.90
CRI >80	THD ≤20%	 -30°C-45°C
	5 YEAR Warranty	

Americanlite® Parking & Canopy LED fixtures are built to withstand rugged outdoor environments and operate in all weather conditions while providing bright, reliable light.


The DPG™ luminaires provide a seamless blend of performance, visual comfort, and accessory options in an elegant profile design to enhance the environment in which they occupy.

Rugged die-cast aluminum construction and gasketed housing makes the DPG™ luminaire virtually impenetrable to contaminants, Wet location & IP65 rated, and resistant to impact too, with IK10 certification, vandal proof. Integrated heatsink fins and isolated power supply compartment allows cooler operation and maximum LED operating life. Impact resistant prismatic polycarbonate lens provides uniform light distribution. Bridgelux 3030 LED technology and state of the art UL dimming driver 0-10V, 120-277v with 6KV surge protection. Beam 160° specially designed for parking facilities, optional beam 110° for canopy applications.

DPG™ luminaire gives you more, with optional CCT and Power Selectable, the latest in Microwave sensor resulting in a versatile fixture, ready for high performance and energy savings. The DPG™ luminaire mounts to a recessed junction box or surface mount with conduit entry points. Can be pendant mounted with NPT pendant stem provided by others.

The DPG™ Series provides years of maintenance-free illumination for outdoor applications. Ideal for gas stations, entrances, parking areas, covered walkways, loading docks schools, gymnasiums, and much more.


Dimensions (mm)

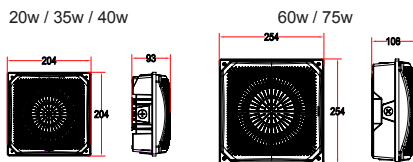

with ER Driver

20w-40w

60w / 75w

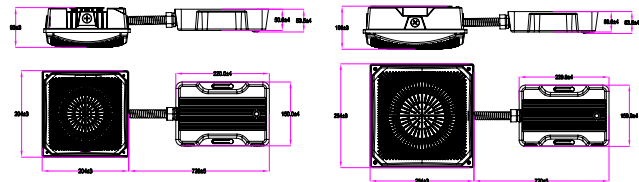

Ordering information

Model	Power	Lumens	CCT
AL674430	20w	2740	Blank 5000K
AL674431	35w	4795	57 5700K
AL674432	40w	5480	4 4000K
AL674433	60w	8220	3 3000K
AL674434	75w	10275	

CCT Select / Power Select			
Model	Power	Lumens	CCT
AL674435	20w/15w/10w	2740/2055/1370	3K/4K/5K
AL674436	35w/20w/10w	4795/3740/1370	3K/4K/5K
AL674437	40w/30w/20w	5480/4110/2740	3K/4K/5K
AL674438	60w/40w/25w	8220/5480/2055	3K/4K/5K
AL674439	75w/60w/40w	10275/8220/5480	3K/4K/5K



Housing	Options
Blank White	C1 Beam 110° (Canopy Application)
BR Bronze	S1 SPD 10kV (LYSPD10A)
	MS Motion Sensor (HB02DMS)
	E1 15w ER driver 25-55w (BLD-CM20E-480800)
	AL574327 Remote Control (HB03R)

Notes

- Lumen Tolerance ± 10%
- Driver Surge Protection: L/N-PE 6kV, L-N: 4kV
- LED Chips: Single CCT= Lumileds 2835 CCT Selectable= Bridgelux 3030
- Lumens based on 5K 5700K =137 l/w 4000k = 141 l/w 3000K = 125 l/w
- Drivers: 20w/60w/75w= Becky Brand 35w/40w = Weled Power Brand
- Housing wall thickness: >1.2mm
- Salt chamber test: 168 hours

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
20w / 35w / 40w	2	31.2 x 27.3 x 28	0.0238	5.1
60w / 75w	2	33.2 x 32.3 x 33	0.0353	7.6

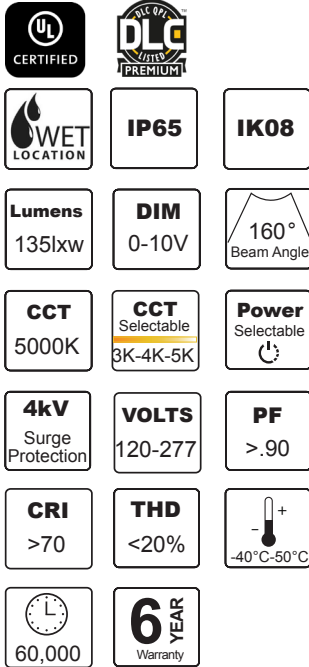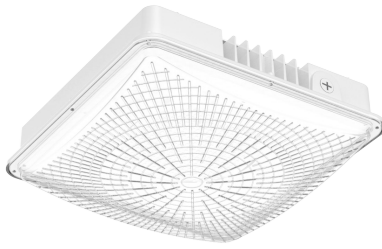

Americanlite® Parking & Canopy LED fixtures are built to withstand rugged outdoor environments and operate in all weather conditions while providing bright, reliable light.

The BPG™ luminaires provide a seamless blend of performance, visual comfort, and accessory options in an elegant profile design to enhance the environment in which they occupy.


Rugged die-cast aluminum construction and gasketed housing makes the BPG™ luminaire virtually impenetrable to contaminants, Wet location & IP65 rated, and resistant to impact too, with IK08 certification. Integrated heatsink fins and isolated power supply compartment allows cooler operation and maximum LED operating life. Impact resistant prismatic polycarbonate lens provides uniform light distribution. Lumileds® 2835 LED technology and state of the art UL IP54 dimming driver 0-10V, 120-277v with 4KV surge protection. Beam 160° specially designed for parking facilities, optional beam 110° for canopy applications.

BPG™ luminaire gives you more, with optional CCT and Power Selectable, the latest in selectable technology resulting in a versatile fixture, ready for high performance and energy savings. The BPG™ luminaire mounts to a recessed junction box or surface mount with conduit entry points. Can be pendant mounted with NPT pendant stem provided by others.


The BPG™ Series provides years of maintenance-free illumination for outdoor applications. Ideal for gas stations, entrances, parking areas, covered walkways, loading docks schools, gymnasiums, and much more.

Dimensions (mm)

35w / 50w / 75w



100w / 120w



Ordering information

Model	Power	Lumens	CCT	Housing Color
AL674440	35w	4725	Blank	5000K
AL674441	50w	6750	57	5700K
AL674442	75w	9450	4	4000K
AL674443	100w	13500	3	3000K
AL674444	120w	16200		

CCT Select / Power Select

Model	Power	Lumens	CCT
AL674445	50w/40w/30w	6750/5400/4050	3K/4K/5K
AL674446	75w/60w/45w	9450/8100/6075	3K/4K/5K
AL674447	120w/96w/72w	16200/12960/9720	3K/4K/5K

Notes

- Lumen Tolerance ± 5%
- Lumens based on 5K
5700K=135 l/w
4000K=135 l/w
3000K=125 l/w
- LIFE @ 65°C (tc)
- SDCM: <7
- BUG:
34w-70w= B2U3G2
100w-120w= B3U3G3

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
35w / 50w / 75w	5	49.5 x 27 x 27	0.0360	6.5
100w / 120w	4	45.2 x 34 x 34	0.0520	8.9



CGD™ 45w/70w

	IP65	IK08
LM79	LM80	Lumens 115 LxW
DIM 0-10V		CCT 5000K
VOLTS 120-277	10Kv Surge Protector	PF >.90
CRI 70	THD <20%	 100,000
 -40°C to +50°C	10 YEAR Warranty	

Americanlite® Canopy LED fixtures are built to withstand rugged outdoor environments and operate in all weather conditions while providing bright, reliable light.


The CGD™ luminaires provide a seamless blend of performance, visual comfort and accessory options in an elegant low-profile design to enhance the environment in which they occupy.

Low profile rugged die-cast aluminum construction and gasketed housing make the CGD™ luminaire virtually impenetrable to contaminants. Integrated heatsink fins allows cooler operation and maximum LED operating life. CGD™ Series housing, with DURATEK™ white finish, a unique polyester powder paint electrostatically applied for lasting durability, allows withstand extreme weather changes without cracking and peeling. Impact resistant clear prismatic polycarbonate lens provides uniform light distribution.

DOB (“driver on board”) Technology, 0-10v dimming operates on any line voltage from 120-277V (50/60Hz), with 10KV surge protection and 100,000 hours. Top grade Luxeon® Led’s, LM80 tested, Microwave Motion Sensor on/off and dimming function optional. CGD™ fixture mounts to a recessed junction box or surface mount with three conduit entry points. Can be pendant mounted with 3/4 NPT pendant stem provided by others.

The CGD™ Series provides years of maintenance-free general illumination for outdoor applications. Ideal for gas stations, entrances, parking areas, covered walkways and loading docks.

Dimensions (mm)

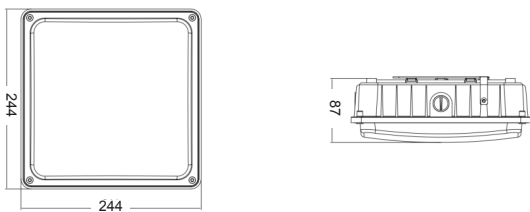

Ordering information

Model	Power	CCT	Lumens	CCT	Housing Color	Options
AL574486	45w	5000K	5200	Blank 5000K	Blank White (standard)	S Microwave Motion Sensor
AL574487	70w	5000K	8050	4 4000K 57 5700K	B Bronze	

Ordering information

• Lumen Tolerance ± 10%

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
45w/70w	1	30.5 x 27 x 14.5	0.0120	2.6

Luxeon® is a registered brand. All rights reserved.



Americanlite® Canopy LED fixtures are built to withstand rugged outdoor environments and operate in all weather conditions while providing bright, reliable light.


The CPG™ luminaires provide a seamless blend of performance, visual comfort and accessory options in an elegant low profile design to enhance the environment in which they occupy.

Low profile rugged die-cast aluminum construction and gasketed housing make the CPG™ luminaire virtually impenetrable to contaminants. IP65 rated. Integrated heatsink fins and isolated power supply compartment allows cooler operation and maximum LED operating life.

CPG™ Series die cast aluminum housing, with Duratek™ white finish, a unique polyester powder paint electrostatically applied for lasting durability, allows to withstand extreme weather changes without cracking and peeling. Top grade HongLi® SMD2835 Led's, LM80 tested. State of the art UL Sosen® driver, IP67 1-10v, 120V-277V with 10KV surge protection. Impact resistant IK08 Clear Stripe PC lens provides uniform light distribution. CPG™ fixture can be surface mounted easily from below the canopy deck and can be pendant mounted.

The CPG™ Series provides years of maintenance-free general illumination for outdoor applications. Ideal for gas stations, entrances, parking areas, covered walkways and loading docks.

Dimensions (mm)

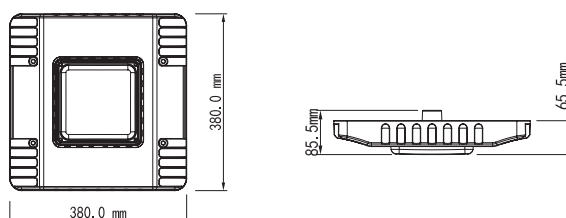

Ordering information

Model	Power	Lumens	CCT	Options
AL674420	95w	12350	Blank 5700K	EM (Emergency back-up remote*)
AL674421	120w	15600	5 5000K	
AL674419	130w	19500	4 4000K	
AL674422	150w	22000		

Notes

- UL, cUL, DLC-V5.1 (Premium certificate)
- 150w = No DLC
- Lumen Tolerance ± 10%
- BUG: B3-U3-G3
- Color Consistency: <6
- 95w = 100-277V
- Driver Surge Protection: L/N-PE 10kV, L-N: 6kV
- Life time @ Driver CTc@70°C
- Housing wall thickness: >1.2mm
- Salt chamber test: 168 hours
- *Remote mount emergency pack 15W, for field installation (< 25ft remote mount wire length). Order separately from fixture, code #AL6744-EM, not pre wire.

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
95 / 120w / 130w / 150w	1	42.5 x 42 x 12	0.0214	5.52



150w / 180w / 200w / 240w



Americanlite® Canopy LED fixtures are built to withstand rugged outdoor environments and operate in all weather conditions while providing bright, reliable light.



The CGP™ luminaires provide a seamless blend of performance, visual comfort in an elegant low profile design to enhance the environment in which they occupy.

Low profile rugged die-cast aluminum construction and gasketed housing make the CGP™ luminaire virtually impenetrable to contaminants, IP65 rated. Integrated heatsink fins and isolated power supply compartment allows cooler operation and maximum LED operating life.

CGP™ Series die cast aluminum housing, with Duratek™ finish, a unique polyester powder paint electrostatically applied for lasting durability, allows to withstand extreme weather changes without cracking and peeling. Impact resistant IK10 Clear lens provides uniform light distribution. Top grade HongLi® SMD2835 Led's, LM80 tested. State of the art UL Sosen® driver, Class P, IP67 1-10v, 120V-277V with 10KV surge protection.

CGP™ fixture can be surface mounted easily from below the canopy deck, recessed or pendant mounted. The CGP™ Series provides years of maintenance-free general illumination for outdoor applications. Ideal for gas stations, entrances, parking areas, covered walkways and loading docks.

Dimensions (mm)



Ordering information


Model	Power	Lumens	CCT	Housing	Options
AL674556	150w	22500	Blank 5700K	Blank White	SP1 SPD 10KV (LYSPD10A)
AL674557	180w	25200	5 5000K	BR Bronze	
AL674558	200w	30000	4 4000K		
AL674559	240w	36000			

Notes

- Lumen tolerance ± 10%
- Lumen based on 5000K
4K = 140 lxw
5K/57K = 150 lxw
- Surge Protection:
L/N-PE: 10kV, L-N: 6kV
- Driver Brand: Sosen
- LED Chips: Hongli 2835
- BUG:
150w= B4-U3-G2
180w/200w= B4-U3-G3
240w= B5-U3-G3
- SDCM: <6
- 120K Lifespan @ Case Tc <65°C
- Housing/Body:
Diecast Aluminum ADC12, 37mm thickness
- PC Lens: 31mm thickness
- Salt chamber test: 168 hours

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
150w-240w	1	56 x 56 x 16	0.0501	9

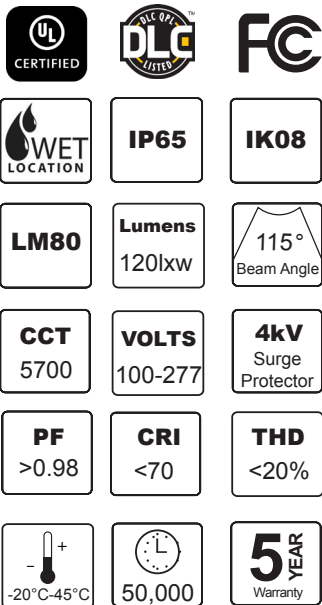

The CGS™ parking garage luminaire combines excellent performance with exceptional value, being one of the most energy efficient lighting solutions for the environment as well as for your pocket.

Whether you are looking for the lowest wattage LED solution or you need an enhanced sense of security and higher light levels, the CGS™ Series does the job.



The CGS™ 60w is the perfect solution for a typical IES RP20 design guidelines, offering one of the most energy efficient solutions available today. Designed as a direct replacement for a standard 150/175w watt system, creating more than 60% energy savings. The installation and maintenance costs are also reduced by at least 50%.

When safety and sense of security are top priorities, higher light levels may be necessary. CGS™ 120w provides higher lumen output (14,400) without the need for additional luminaires and is ideal for garage entrances and exit transitions or where higher than normal ceilings exist.

Housing is made of aluminum ADC12, with Duratek™ polyester powder-coated finish for durability and corrosion protection. Diffuser is made with Bayer® 2407 PC IK08 Grade. 100,000 hours CREE white LEDs. UL certified State-of-the-art driver provides excellent system efficiency, control and protection (50,000 hours). Driver components are fully encased in potting for IP67 moisture resistance, and a 4kV built in surge protector. 0-10V dimmable option is available. Complies with IEC and FCC standards. The Durashield™ silicon gasket seals the chamber to IP65 grade, preventing intrusion of environmental contaminants.

CGS™ Series is an excellent choice for ceiling, canopy and parking garage applications.

Dimensions (mm)



	A	B	C
40w/60w	226	226	105
60w-120w	343	343	113

	A	B	C
40w/60w	316	316	62
60w-120w	417	417	62

Optional frame for recess installation

Ordering information

Model	Power	Lumens	Size	Driver	CCT	Housing	Frame
AL574078	40w	4800	226x226x105		Blank 5700K	Blank White BR Bronze	AL574091 40w/60w AL574090 60w*-120w
AL574079	40w	4800	226x226x105	0-10V	5 5000K		
AL574074	60w	7200	226x226x105		4 4000K		
AL574076	60w	7200	226x226x105	0-10V			
AL574084	60w	7200	343x343x113				
AL574085	60w	7200	343x343x113	0-10V			
AL574080	85w	10200	343x343x113				
AL574081	85w	10200	343x343x113	0-10V			
AL574082	100w	12000	343x343x113				
AL574083	100w	12000	343x343x113	0-10V			
AL574070	120w	14400	343x343x113				
AL574072	120w	14400	343x343x113	0-10V			

Notes

• Power Factor @ 120V = .98 / 240V = .95 / 277V = .90

Ordering information

Model	CBM (Master)	Pieces per master	Box Dimensions (cm)	Gross weight (Kg)
40w-60w	0.0125	1	28 x 28 x 16	3.6
60w-120w	0.0273	1	39.5 x 39.5 x 17.5	6.5
Small Frame	0.0163	2	33 x 33 x 15	4.7
Large Frame	0.0277	2	43 x 43 x 15	6.7

RPG™

25w/40w/55w
75w/100w



Americanlite® LED Canopy fixtures are built to withstand rugged outdoor environments and operate in all weather conditions while providing bright, reliable light.

The RPG™ luminaires provide a seamless blend of performance and visual comfort. In an elegant round low-profile form, enhances the environment in which they occupy. RPG™ Series luminaire is a strong and versatile fixture, ready for high performance and energy savings.


Rugged die-cast aluminum construction and gasketed housing make the RPG™ luminaire virtually impenetrable to contaminants (Wet location / IP65 rated). Integrated heatsink fins and isolated power supply compartment allows cooler operation and maximum LED operating life. Impact resistant clear prismatic polycarbonate lens (UL746C recognized) provides uniform light distribution and roughness with IK08 level. 0-10V UL dimming driver, integrated Surge protection up to 4kV and a wide range 100-277v. The RPG™ Series luminaire mounts to a recessed junction box or surface mount with 4 (1/2") conduit entry points. Can be pendant mounted with NPT pendant stem provided by others.

RPG™ Series allows you to do more, we have created one of the most versatile canopy fixtures in the market. CCT selectable 3000-4000-5000K (switch inside the fixture) and microwave sensor fulfils the spectrum of options. RPG™ Series is UL and DLC certified.


The RPG™ Series provides years of maintenance-free general illumination for outdoor and indoor applications. Ideal for entrances, parking areas, covered walkways and loading docks.

	IP65	IK08
CCT Selectable 3K-4K-5K	Lumens 135LxW	DIM 0-10V
150° Beam Angle	VOLTS 100-277	4kV Surge Protection
PF ≥.90	CRI >80	THD ≤20%
 -30°C-50°C	 50,000	5 YEAR Warranty

Dimensions (mm)

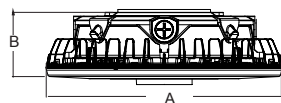

Model	A	B
25w/40w/55w	255	79
75w/100w	280	79

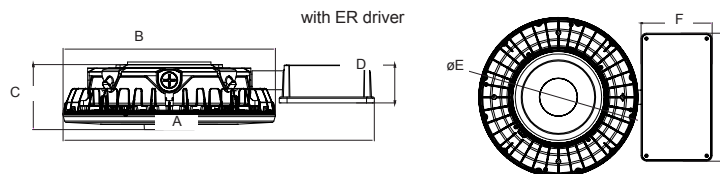

Model	A	B	C	D	E	F	G
25w/40w/55w	397.7	255	85.9	50	255	125	225
75w/100w	410.2	280	85.9	50	280	125	255

Ordering information

Model	Power	CCT	Lumens	Options
AL574491	25w	3K/4K/5K	3000/3000/3375	MS Motion Sensor (MC605V/D)
AL574492	40w	3K/4K/5K	4800/4800/5400	E1 15w ER driver 25-55w (BLD-CM20E-480800)
AL574493	55w	3K/4K/5K	6600/6600/7425	
AL574494	75w	3K/4K/5K	9000/9000/10125	
AL574495	100w	3K/4K/5K	12000/12000/13500	

Notes

- Surge protection:
 - 25w-55w = 2kV
 - 75w-100w = 4kV
- 3000K= 120lxw
- Housing wall thickness: >1.2mm
- Salt chamber test: 168 hours

Packing information

Model	Pieces per master	Box Dimensions (cm)	CBM (Master)	Gross Weight (KG)
25w	2	32 x 30 x 32	0.0307	5.5
40w 55w	2	32 x 30 x 32	0.0307	5.5
75w/100w	2	34.5 x 30 x 34.5	0.0357	9



Warranty

Americanlite® is pleased to provide a 5 year limited warranty covering the LED fixtures in this catalogue. Americanlite® warrants that the LED fixtures comply with Americanlite®'s published specifications and are free from defects in materials and workmanship.

All our products are CE, ETL or UL approved and manufactured with approved components. Americanlite® reserves the right to change or improve the design or components of any of its products due to parts availability or changes in standards, without assuming any obligation to modify any product previously manufactured and without notice. All equipment is tested and inspected before shipment.

This warranty is void if the product is operated outside of its normal operating conditions. The foregoing warranty does not apply to failures caused by acts of God or as a result of any abuse, misuse, abnormal use, or use in violation of any applicable standard, code or instructions for use in installations, including, but not limited to, those contained in the Standards for the International Electrotechnical Commission. Americanlite® reserves and has the right to examine failed fixtures to determine the cause of failure, excessive lumen depreciation and patterns of usage.