



Load Centers

americanlite[®]

We light your world[™]




Item AL603034

2 Circuit Load Center Outdoor Type 3R Enclosure

2 Circuit Load Center Main Lug Single Phase 70A 120V/240 VAC Outdoor Type 3R Enclosure, Interrupting Capacity Rating @ 65, Circuit Breaker Style Plug-In, space for 2x1" or 4x1/2" breakers, 70A bus ampere rating.

Dimensions (inches)

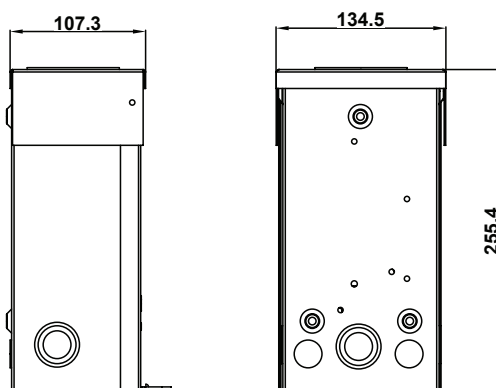

Specifications

Input / Output Voltage	120/240V AC
Type	Standard
Interrupting Capacity Rating	65
Amperage	70 A
Enclosure	Outdoor Type 3R
Material	Steel 1.2mm
Conductors	Copper

Device Type	Convertible
Phase	1 Phase
Socket Type	0
THQL 1" Space	2
THQP 1/2" Space	4
Feed	Either
Door	Yes

Packing information

Pieces per master	CBM (Master)	Box Dimensions (CM)	Gross weight (KGS)
8	0.0378	54 x 30.5 x 23	16.5




8 Circuit Load Center Outdoor Type 3R Enclosure

8 Circuit Load Center Main Lug Single Phase 125A 120/240 VAC Outdoor Type 3R Enclosure, Interrupting Capacity Rating @ 65, Circuit Breaker Style Plug-In, space for 8, 1" breakers, 125 A bus ampere rating.

Item AL603030

Dimensions (inches)

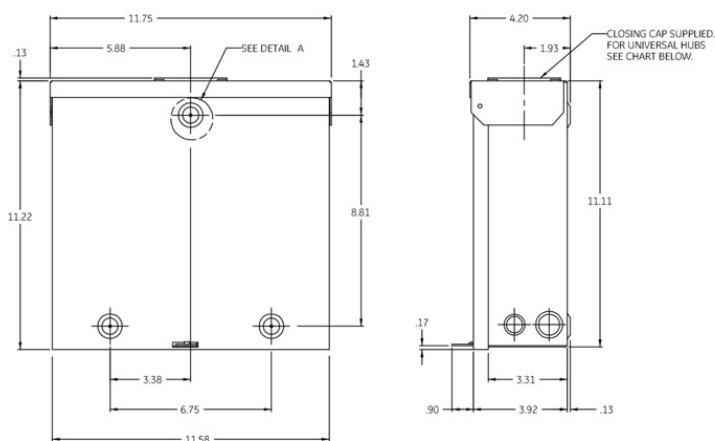

Specifications

Input / Output Voltage	120/240V AC
Type	Standard
Interrupting Capacity Rating	65
Amperage	125 A
Device Type	Convertible
Enclosure	Outdoor Type 3R

Phase	1 Phase
Socket Type	0
THQL 1" Space	8
THQP 1/2" Space	16
Feed	Either
Door	Yes

Packing information

Pieces per master	CBM (Master)	Box Dimensions (CM)	Gross weight (KGS)
4	0.0522	32 x 48 x 34	19.6



Warranty

Americanlite® is pleased to provide a 2 year limited warranty covering the Load Centers in this catalogue. Americanlite® warrants that the Load Centers comply with Americanlite®'s published specifications and are free from defects in materials and workmanship.

Americanlite® reserves the right to change or improve the design or components of any of its products due to parts availability or changes in standards, without assuming any obligation to modify any product previously manufactured and without notice. All equipment is tested and inspected before shipment.

This warranty is void if the product is operated outside of its normal operating conditions. The foregoing warranty does not apply to failures caused by acts of God or as a result of any abuse, misuse, abnormal use, or use in violation of any applicable standard, code or instructions for use in installations, including, but not limited to, those contained in the Standards for the International Electrotechnical Commission. Americanlite® reserves and has the right to examine failed fixtures to determine the cause of failure, excessive lumen depreciation and patterns of usage.