



Downlite™ Series

UL Downlights

americanlite.®

We light your world™



LED



DLX Pro™ Series

CCT & Power Selectable

4"/6"/8"/10"



Power Selectable 	CCT Selectable 3K-65K 	0-10V+ Dimmable
Lumens Up to 104 lwm 	90° Beam Angle 	VOLTS 120-277
PF >0.90 	1KV Surge Protection 	THD <20%
CRI >90 	UGR <26 	SDCM <7
-20°C~40°C	75,000	5 YEAR Warranty

Americanlite® DLX Pro™ Series is a performance grade architectural downlighting system engineered to deliver high efficacy illumination, optical control, and installation efficiency. The series is designed to support a wide range of commercial and architectural applications while optimizing energy performance, visual comfort, and field adjustability. Featuring an install from below configuration, glare controlled optics, and efficient light delivery, DLX Pro™ is suitable for renovation, remodel, and new construction environments.


Americanlite® Power and CCT Selectable technology utilizes integrated on fixture switching to allow field adjustment of both lumen output and correlated color temperature. Each luminaire provides four selectable CCT options 3K, 35K, 4K, 5K or 3K, 4K, 5K, 65K, as well as three selectable wattage settings to support multiple application requirements. This flexibility allows precise tuning of light output and color appearance without fixture replacement. DLX Pro™ Series luminaires are equipped with 0 to 10V dimming drivers and operate across a universal 100 to 277V input voltage range.

The DLX Pro™ Series is designed to facilitate installation from below the ceiling plane, making it well suited for retrofit, remodel, or new construction applications where joists, ductwork, or structural obstructions are present. The system incorporates high performance LED drivers and integrated lighting controls to ensure reliable operation, energy efficiency, and long term performance.

The DLX Pro™ Series is a specification grade architectural downlighting solution engineered for consistent optical performance and mechanical precision. The platform delivers controlled beam distribution, reduced glare, and high visual comfort while supporting efficient installation and future adaptability within evolving lighting control systems.

Americanlite®'s commitment to lighting engineering, product consistency, and technology advancement ensures dependable performance and design flexibility for lighting designers, engineers, and specification professionals across demanding commercial applications.

Dimensions (mm)



Size	A	B	C	D (Cut out)
4"	140	102	92.62	110
6"	187	136	100.91	152
8"	240	177	110.56	190
10"	286	198	110.98	205

Ordering information

Item	Power	Size	3000K	3500K	4000K	5000K	Item	Power	Size	3000K	4000K	5000K	6500K	Option
AL582800	12w	4"	1000	1050	1100	1100	AL582806	12w	4"	1000	1050	1100	1100	EM 8w Emergency Battery
	9w		800	850	880	880		9w		800	840	880	880	
	7w		600	620	660	660		7w		600	630	660	660	
AL582801	16w	6"	1500	1550	1650	1650	AL582807	16w	6"	1500	1575	1650	1650	
	12w		1100	1120	1210	1210		12w		1100	1155	1210	1210	
	9w		800	830	880	880		9w		800	840	880	880	
AL582802	24w	6"	2000	2100	2200	2200	AL582808	24w	6"	2000	2100	2200	2200	
	19w		1600	1650	1760	1760		19w		1600	1680	1760	1760	
	15w		1200	1300	1375	1375		15w		1200	1260	1320	1375	
AL582803	22w	8"	2000	2100	2200	2200	AL582809	22w	8"	2000	2100	2200	2200	
	16w		1500	1540	1650	1650		16w		1500	1575	1650	1650	
	11w		1000	1030	1100	1100		11w		1000	1050	1100	1100	
AL582804	33w	8"	3000	3100	3300	3300	AL582810	33w	8"	3000	3150	3300	3300	
	29w		2700	2780	2970	2970		29w		2700	2835	2970	2970	
	25w		2400	2450	2640	2640		25w		2400	2520	2640	2640	
AL582805	43w	10"	4000	4200	4400	4400	AL582811	43w	10"	4000	4200	4400	4400	
	37w		3500	3650	3850	3850		37w		3500	3675	3850	3850	
	32w		3000	3100	3300	3300		32w		3000	3150	3300	3300	

Notes

- Lumen tolerance up to 10%
- Body = Aluminum
- LED Chip Brand = Lumileds 2835
- Lens = PC
- Driver compartment = PC
- Cable Spec: Black/White/Green 18AWG, Pink/Purple 22AWG
- Length = 485mm
- ER Driver: Brand: Streamer Part # STB45FA-08WL-170 ER Driver ships uninstalled
- L70 @ 50,000 hrs

Packing information

Model	CBM (Master)	Pieces per master	Box Dimensions (CM)	Gross weight (KGS)
4"	0.0113	4	30.5 x 15.5 x 24	1.95
6"	0.0197	4	40 x 20.2 x 24.5	2.59
8"	0.0347	4	50.5 x 25.5 x 27	3.5
10"	0.0443	4	60 x 30.2 x 24.5	4.4



DCX Pro™ Series

CCT & Power Selectable

4"/6"/8"/10"

CRI 80




The DCX Pro™ Series is everything you need in a downlight at an affordable price. Whether it's the seamless install from-below design, abundant energy savings or maintaining glare-free aesthetics, DCX Pro™ is the perfect solution for any renovation, remodel or new construction project. To top it off, DCX Pro™ has a broad offering of aperture sizes, drivers, accessories, and switchable CCTs and lumens.

Americanlite® innovative Power & CCT Selectable feature incorporates a switch on each fixture for simple power & color temperature adjustment. Not 3.... but 5 different CCT choices for every single application (2700-3000-3500-4000-5000K) and 3 different wattages. Too warm or too cool? too bright? Simply toggle the integrated switches to your desired setting and you are done! Whatever your application, the DCX Pro™ Series luminaires are sure to give you the feel and flexibility that you need. More flexibility? DCX Pro™ Series fixtures are dimmable 0-10V driver with a 100-277v range.

The DCX Pro™ Series allows for easy retrofit, remodel or new construction installation from below the ceiling as the perfect choice when you have joists or duct work in the way. Engineered with high performance drivers and lighting controls to deliver a sustainable and long-lasting downlighting solution. They are wet location listed, making them ideal for use in a breadth of outdoor residential, hospitality, light commercial and multi-family applications.

The DCX Pro™ Series is the ideal specification-grade architectural downlighting. It delivers exceptional visual comfort and optical control, extraordinary mechanical precision, installation efficiency and future proofing.

Dimensions (mm)

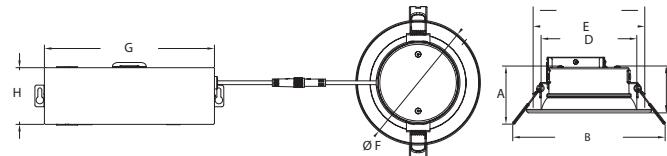

Power	Size	Cut Out					
		A	B	C	D	E	G
15w	4"	61.5	161.4	49.6	101.2	118	132
18w	6"	60.3	209	57.1	125.8	140	187
30w	8"	84.6	259.1	81.4	180	185	220
38w	10"	82.8	311	81.4	221.2	235	271
							180
							85.6

Ordering information

Item	Power	Size	2700K	3000K	3500K	4000K	5000K	Options
AL582535	15w	4"	1543	1648	1724	1727	1627	ER 8w ER Battery
	11w		1160	1229	1275	1307	1266	
	7w		745	783	807	816	811	
AL582536	18w	6"	1809	1938	2057	2050	1933	
	14w		1474	1569	1637	1648	1588	
	10w		1050	1107	1148	1159	1143	
AL582537	20w	6"	1930	2074	2192	2187	2040	
	16w		1631	1745	1832	1838	1750	
	12w		1333	1415	1473	1488	1443	
AL582538	30w	8"	2674	2858	3054	3078	2889	
	24w		2417	2547	2703	2732	2589	
	18w		1862	1955	2048	2076	2025	
AL582539	38w	10"	3903	4189	4462	4467	4164	
	30w		3311	3539	3740	3763	3584	
	22w		2563	2705	2859	2874	2786	

Notes

- Lumen tolerance 10%
- ER Battery 90 min = BLD-HM08D-YYY
- AL582537: No ETL
- LED Chip Brand = Runlite
- 277V lumens = 7-12% more than 120V
- Complies with UL 1598

Packing information

Model	CBM (Master)	Pieces per master	Box Dimensions (CM)	Gross weight (KGS)
4"	0.0607	16	43.4 x 39.4 x 35.5	8.8
6"	0.0541	12	40.4 x 40 x 33.5	8
8"	0.0644	8	51.8 x 48.8 x 25.5	7.93
10"	0.0941	8	61.8 x 58.8 x 25.9	7.96



DCX Pro™ Series

CCT & Power Selectable

4"/6"/8"/10"

CRI 90

	IK05	LM80
DIM 0-10V	5CCT Selectable 27K-5K	Power Selectable
Lumens up to 98 lww	VOLTS 100-277	CRI ≥ 90
PF ≥ .90	THD <15%	1KV Surge Protection
	SCDM < 6	UGR > 22
	50,000	5 YEAR Warranty


The DCX Pro™ Series is everything you need in a downlight at an affordable price. Whether it's the seamless install from-below design, abundant energy savings or maintaining glare-free aesthetics, DCX Pro™ is the perfect solution for any renovation, remodel or new construction project. To top it off, DCX Pro™ has a broad offering of aperture sizes, drivers, accessories, and switchable CCTs and lumens.

Americanlite® innovative Power & CCT Selectable feature incorporates a switch on each fixture for simple power & color temperature adjustment. Not 3.... but 5 different CCT choices for every single application (2700-3000-3500-4000-5000K) and 3 different wattages. Too warm or too cool? too bright? Simply toggle the integrated switches to your desired setting and you are done! Whatever your application, the DCX Pro™ Series luminaires are sure to give you the feel and flexibility that you need. More flexibility? DCX Pro™ Series fixtures are dimmable 0-10V driver with a 100-277v range.

The DCX Pro™ Series allows for easy retrofit, remodel or new construction installation from below the ceiling as the perfect choice when you have joists or duct work in the way. Engineered with high performance drivers and lighting controls to deliver a sustainable and long-lasting downlighting solution. They are wet location listed, making them ideal for use in a breadth of outdoor residential, hospitality, light commercial and multi-family applications.

The DCX Pro™ Series is the ideal specification-grade architectural downlighting. It delivers exceptional visual comfort and optical control, extraordinary mechanical precision, installation efficiency and future proofing.

Dimensions (mm)

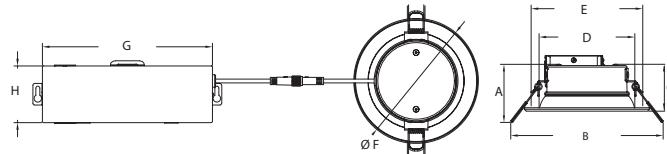

Power	Size	Cut Out					
		A	B	C	D	E	F
15w	4"	61.5	161.4	49.6	101.2	118	132
18w	6"	60.3	209	57.1	125.8	140	187
30w	8"	84.6	259.1	81.4	180	185	220
38w	10"	82.8	311	81.4	221.2	235	271
							180
							85.6

Ordering information

Item	Power	Size	2700K	3000K	3500K	4000K	5000K	Options
AL582569	15w	4"	1027	1072	1136	1145	1080	ER 8w ER Battery
	11w		864	900	941	950	915	
	7w		558	575	593	598	590	
AL582570	18w	6"	1486	1565	1595	1686	1602	
	14w		1226	1276	1339	1310	1260	
	10w		845	868	898	906	889	
AL582571	20w	6"	1538	1631	1760	1796	1686	
	16w		1303	1380	1468	1508	1424	
	12w		1060	1106	1167	1190	1150	
AL582572	30w	8"	2300	2493	2572	2566	2413	
	24w		2026	2124	2230	2254	2130	
	18w		1618	1681	1745	1751	1698	
AL582573	38w	10"	3150	3350	3593	3603	3386	
	30w		2636	2800	2931	2946	2806	
	22w		2035	2123	2212	2226	2160	

Notes

- Lumen tolerance < 10%
- ER Battery 90 min = BLD-HM08D-YYY
- AL582571: No ETL or ES
- LED Chip Brand = Runlite
- 277V lumens = 7-12% more than 120V
- Complies with UL 1598

Packing information

Model	CBM (Master)	Pieces per master	Box Dimensions (CM)	Gross weight (KGS)
4"	0.0607	16	43.4 x 39.4 x 35.5	8.8
6"	0.0541	12	40.4 x 40 x 33.5	8
8"	0.0644	8	51.8 x 48.8 x 25.5	7.93
10"	0.0941	8	61.8 x 58.8 x 25.9	7.96



Disk™ Series CCT Selectable 4"/6"

Intertek		
LM80	DOB Tech	5CCT Selectable 27K-5K
Lumens 82 Ixw		110° Beam Angle
VOLTS 120V	CRI 90	.5 KV Surge Protection
PF ≥.90	THD <20%	UGR 22
SDCM <7		60,000
5 YEAR Warranty		

Americanlite® Disk™ Series luminaires utilize advanced DOB (Driver on Board) LED technology to deliver an ultra-low-profile, surface-mounted lighting solution that replicates the visual performance of traditional recessed downlights. The Disk™ Series provides high lumen output and energy-efficient operation in a compact form factor, designed for fast and straightforward installation. The shallow housing depth makes the luminaire especially well-suited for applications with limited plenum space or where recessed installation is not feasible.

Americanlite® Disk™ Series luminaires are equipped with Americanlite® CCT Selectable technology, featuring integrated on-fixture switching for field adjustment of correlated color temperature. Each luminaire offers five selectable CCT options: 2700K, 3000K, 3500K, 4000K, and 5000K, allowing precise control of light appearance without the need for fixture replacement.

The Disk™ Series supports TRIAC dimming from 100% down to 10% for smooth, stable light control across a wide range of residential and commercial dimmers. The housing and trim are constructed from durable iron with a standard white finish that is paintable, with additional color options available to meet design requirements. A precision-engineered optical system delivers uniform luminance through a low-profile convex diffuser, ensuring consistent light distribution while reducing glare and visual discomfort.

The Americanlite® Disk™ Series provides exceptional design flexibility at a strong value point. It is suitable for both residential and commercial applications and is ideal for general illumination in environments such as schools, hotels, storage areas, corridors, basements, kitchens, and other interior spaces. The luminaire is designed to meet common electrical and performance standards, making it a reliable solution for new construction, renovation, and retrofit projects.

Dimensions (mm)

	Power	Size	A	B	C	D	with ER Driver								
							10w	15w	10w	15w	Size	A	B	C	D
	10w	4"	152	24.2	12.2	102.3					4"	152	60.28	24.28	102.3
	15w	6"	186	24.2	12.2	134					6"	186	59.13	24.28	134

Ordering information

Item	Power	Size	2700K	3000K	3500K	4000K	5000K	Housing	Option
AL582850	10w	4"	820	830	900	850	830	Blank	White
								SN	Satin Nickel
AL582851	15w	6"	1230	1250	1350	1300	1250	DB	Dark Brown
								BK	Black



Notes

- Compatible Dimmers:**
 - Lutron Leviton MACL-153MR-WH CL-6674
 - SCL-153P CL-6683
 - TG-600PH-LA IPL06
 - DVCL-153P CL-6672
 - MACL-153ME 153M-ES
 - DV-600P
- Lumen Tolerance up to 10%
- Color Trims = 18% < Lumens
- LED Chip = Hongli 2835
- Switch ON/OFF = 15,000 times
- Housing = Iron
- Lens = PC
- Driver: BILDA Part # BLD-HM09T-B
- ER driver + housing is packed separately

Packing information

Model	CBM (Master)	Pieces per master	Box Dimensions (CM)	Gross weight (KGS)
4"	0.0298	30	51.2 x 32.9 x 17.7	6.63
6"	0.0339	24	41.3 x 39.9 x 20.6	7.28
4" / 6" ER Driver	0.0277	15	57.9 x 23.5 x 20.4	15



Disk™ Series

PIR Sensor / CCT Selectable

4"/6"

Intertek		
LM80	DOB Tech	
5CCT Selectable 27K-5K	Lumens 82 lxm	
	VOLTS 120V	CRI 90
.5 KV Surge Protection	PF ≥.90	THD <20%
UGR 22	SDCM <7	
	5 YEAR	

Americanlite® Disk™ Series luminaires utilize advanced DOB (Driver on Board) LED technology to deliver an ultra-low-profile, surface-mounted lighting solution that replicates the visual performance of traditional recessed downlights. The Disk™ Series provides high lumen output and energy-efficient operation in a compact form factor, designed for fast installation and use in applications with limited plenum space or where recessed installation is not feasible.

Disk™ Series luminaires feature Americanlite® CCT Selectable technology with integrated on-fixture switching for field adjustment of correlated color temperature. Each luminaire offers five selectable CCT options: 2700K, 3000K, 3500K, 4000K, and 5000K.

Equipped with an integrated PIR (Passive Infrared) motion sensor for occupancy detection. The sensor detects infrared signals generated by human movement and automatically activates the luminaire when motion is present. A built-in photosensor enables daylight-dependent operation, preventing activation when ambient light levels exceed the preset threshold. Optimal detection performance is achieved when pedestrian movement crosses the sensing field at approximately a 45-degree angle.

The Disk™ Series supports TRIAC dimming from 100% down to 10% for smooth, stable light control across a wide range of residential and commercial dimmers. PIR sensor operation is engineered to function seamlessly with dimming without flicker or false triggering.

The housing and trim are constructed from durable iron with a standard paintable white finish. A precision optical system with a low-profile convex diffuser provides uniform luminance while reducing glare and visual discomfort.

The Americanlite® Disk™ Series is suitable for residential and commercial applications and is ideal for general illumination in corridors, storage areas, basements, kitchens, schools, hotels, and other interior spaces. The luminaire is designed to meet common electrical and performance standards for new construction, renovation, and retrofit projects.


Dimensions (mm)

Power	Size	A	B	C	D	with ER Driver					
						10w	15w	10w	15w	10w	15w
10w	4"	152.6	28.3	16.3	102.3						
15w	6"	186.6	28.3	16.3	134						

Ordering information

Item	Power	Size	2700K	3000K	3500K	4000K	5000K	Housing	Option
AL582852	10w	4"	820	830	900	850	830	Blank	White
AL582853	15w	6"	1230	1250	1350	1300	1250	SN	Satin Nickel
								DB	Dark Brown
								BK	Black

Notes

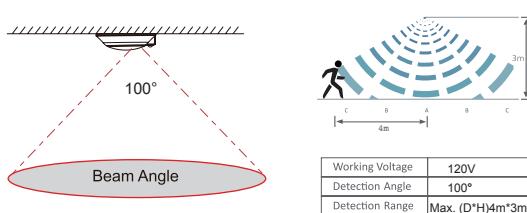

• Compatible Dimmers:

Lutron MACL-153MR-WH	Leviton CL-6674
SCL-153P	CL-6683
TG-600PH-LA	IPL06
DVCL-153P	CL-6672
MACL-153ME	153M-ES
DV-600P	

- Lumen Tolerance up to 10%
- Color Trims = 18% < Lumens
- LED Chip = Hongli 2835
- Switch ON/OFF = 15,000 times
- Housing = Iron
- Lens = PC
- Driver: BILDA Part # BLD-HM09T-B
- ER driver + housing is packed separately

Packing information

Model	CBM (Master)	Pieces per master	Box Dimensions (CM)	Gross weight (KGS)
4"	0.0298	30	51.2 x 32.9 x 17.7	6.63
6"	0.0339	24	41.3 x 39.9 x 20.6	7.28
4" / 6" ER Driver	0.0277	15	57.9 x 23.5 x 20.4	15



Warranty

Americanlite® is pleased to provide a 5 year limited warranty covering the LED fixtures in this catalogue. Americanlite® warrants that the LED fixtures comply with Americanlite®'s published specifications and are free from defects in materials and workmanship.

All our equipment is CE, TUV, FCC or UL approved and manufactured with approved components. Americanlite® reserves the right to change or improve the design or components of any of its products due to parts availability or changes in standards, without assuming any obligation to modify any product previously manufactured and without notice. All equipment is tested and inspected before shipment.

This warranty is void if the product is operated outside of its normal operating conditions. The foregoing warranty does not apply to failures caused by acts of God or as a result of any abuse, misuse, abnormal use, or use in violation of any applicable standard, code or instructions for use in installations, including, but not limited to, those contained in the Standards for the International Electrotechnical Commission. Americanlite® reserves and has the right to examine failed lamp to determine the cause of failure, excessive lumen depreciation and patterns of usage.