

EXIT LIGHTING

USA QuickShip program



americanlite[®]
We light your world™

Red/Green Field Selectable Compact Thermoplastic Exit Sign

STANDARD	OPTIONAL			
   	 			

ILLUMINATION

- Ultra bright, energy efficient, long life field selectable Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.

ORDERING INFORMATION



OPTIONS

- 2C-120V/2C-277V: Voltage-specific Dual Circuit Option on the AC-Only unit enables it to be connected to two different power supplies at the same time.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in USA" under the Buy American Act.


WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EZRXTEU-RED/GREEN EM	1.0	1.0	0.1	0.1

DIMENSIONS

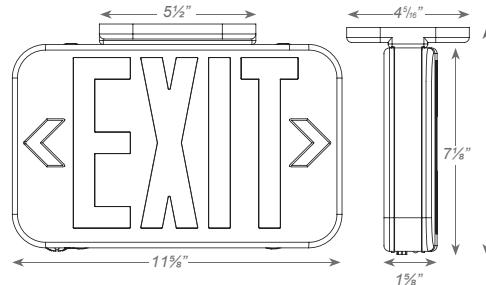

Sample Part Number: EZRXTEU2RGW2C-120

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
EZRXTEU	2	Universal Single/ Double Face	R/G	Red/Green ¹	W White B Black
EZSRXTEU (Salida)				(blank) EM	(blank) AC Only Battery Back-Up
					USA 2C-120 2C-277
					Dual Circuit with 120V input ² Dual Circuit with 277V input ²

¹ Field Selectable

² Available only with AC-Only units

Remote Capable Compact Thermoplastic Exit Sign

STANDARD



OPTIONAL



ILLUMINATION

- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- 3.0W of remote capacity standard
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap thermoplastic mounting canopy included – provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.


OPTIONS

- SPV: UL Listed for special voltage option.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

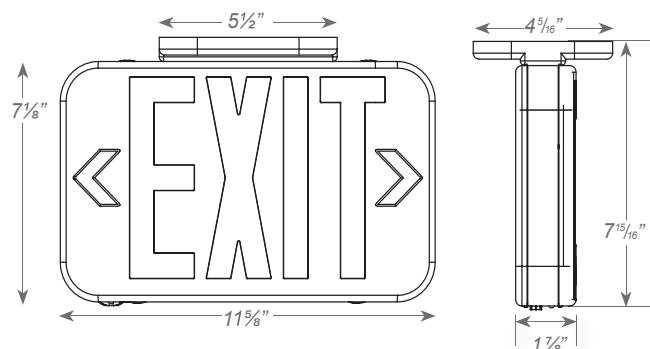

ORDERING INFORMATION

Sample Part Number: CEXTEU3RW

MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		OPTIONS	
CEXTEU	3	Universal Single/Double Face	R	Red	W	White	SDT	Self-Diagnostics ¹
			G	Green	B	Black	SPV	120/230 Volt 50/60Hz ¹
			RG	Red/Green				

NOTES:

¹ Not available with RG units.

Compact Thermoplastic Exit Sign

STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.

OPTIONS

- Custom: Signs available with requested 'special' wording.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in USA" under the Buy American Act.


WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EZRXTEU-RED SDT	2.5	2.5	0.05	0.05
EZRXTEU-GREEN SDT	2.7	2.7	0.05	0.05

DIMENSIONS

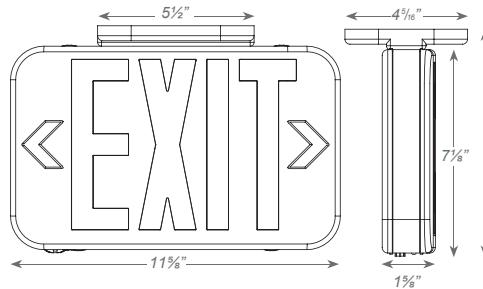

ORDERING INFORMATION

Sample Part Number: **EZRXTEU2RWEMSDT**

SALIDA face plate option available.
Check with your Representative

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
EZRXTEU-SDT	2	R Red G Green	W White B Black	EM NiCd Battery	Custom USA Custom Wording Assembled in the USA

Thin Thermoplastic LED Exit Sign

STANDARD



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Specification-grade, low profile thin plastic design.
- EZ snap-out chevron directional indicators.
- Available specifically in single or double face only.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

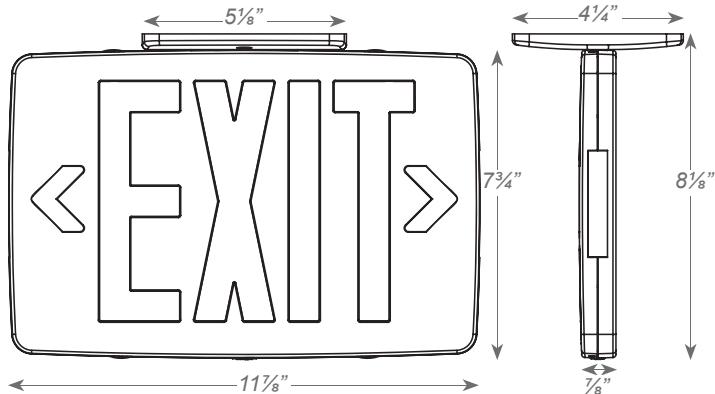

ORDERING INFORMATION

Sample Part Number: **EZTXTEU-1-R-W-EM**

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY
EZTXTEU	1	R Red G Green	W White B Black	Blank EM AC Only Battery Backup
	2			

Thin Thermoplastic Exit Sign



STANDARD



U.S. Patent No.'s:
9,990,868
D825,003

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Specification-grade, low profile thin plastic design.
- EZ snap-out Chevron directional indicators.
- Patented, field selectable universal single / double face configuration.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

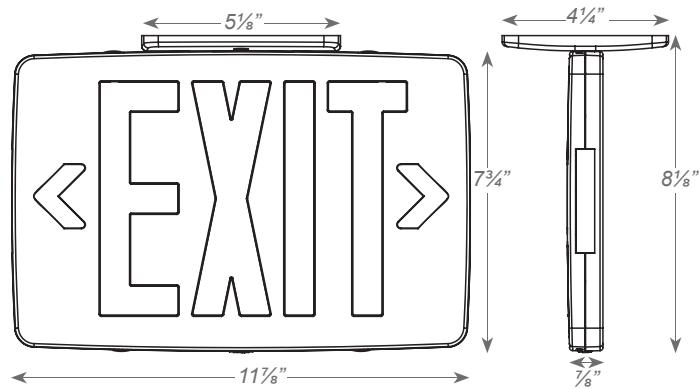

ORDERING INFORMATION

Sample Part Number: ETXTEU3RWEM

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY
ETXTEU	3 Universal Single/ Double Face	R Red G Green	W White B Black	(blank) AC-Only EM Battery Backup

Remote Capable Thermoplastic Exit Sign

STANDARD



OPTIONAL

**ILLUMINATION**

- Ultra-bright, energy efficient, long-life Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- 5.5W of remote capacity standard.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING


- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Snap-out Chevron directional indicators.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage

WARRANTY / LISTING

- Five-year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

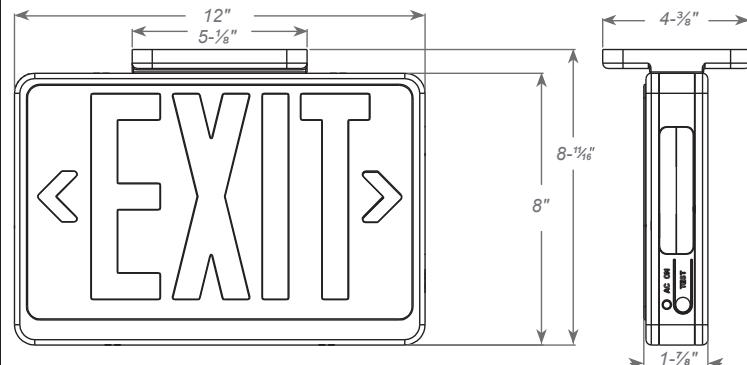DIMENSIONS**ORDERING INFORMATION**Sample Part Number: **CEMXTERW**

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
CEMXTE	Universal Single/ Double Face	R Red G Green	W White B Black	SDT Self-Diagnostics

Low Level All LED Thermoplastic Exit & Emergency Combo

STANDARD



ILLUMINATION

- Long lasting, efficient ultra bright white LED light strip.
- 3.1 watts (24 LEDs x 0.13 watts) per light strip.
- High performance, smooth, chrome plated, metallized reflector with acrylic UV stabilized lens for optimal light distribution.
- Long life ultra-bright, energy efficient Red or Green LED EXIT sign illumination

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to Red/Green LED board and the White LED light strip for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Universal K/O pattern on back plate for wall mount.


HOUSING

- Patented specification-grade, low profile thin plastic design is ideal for low level applications.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out Chevron directional indicators.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 regulations.
- Suitable for use in Floor Proximity Installation.

DIMENSIONS

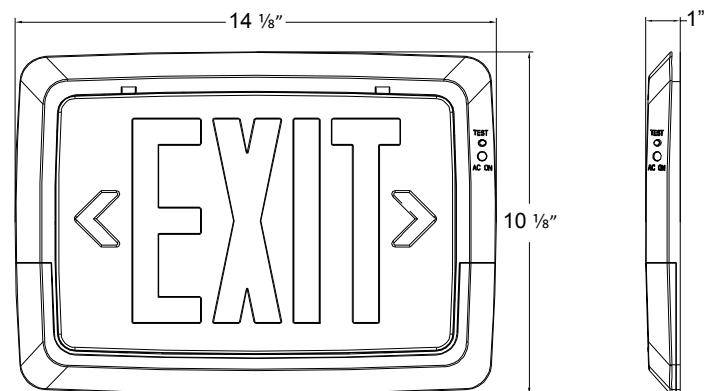

ORDERING INFORMATION

Sample Part Number: LCTXTEU1RW

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR
LCTXTEU	1 Single Face	R Red	W White
		G Green	B Black

Running Man LED Exit Sign



ILLUMINATION

- Ultra bright, energy efficient, long-lasting white LED provides even, fully illuminated panel.

ELECTRICAL

- Dual 120/347 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.
- Field selectable, universal directional indication provided with three (Left, Right and No Arrow) pictogram legends.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA listed for damp locations (0°C – 50°C).
- Meets or exceeds CSA C22.2 No. 141.10 standard requirements for Emergency lighting equipment.

DIMENSIONS

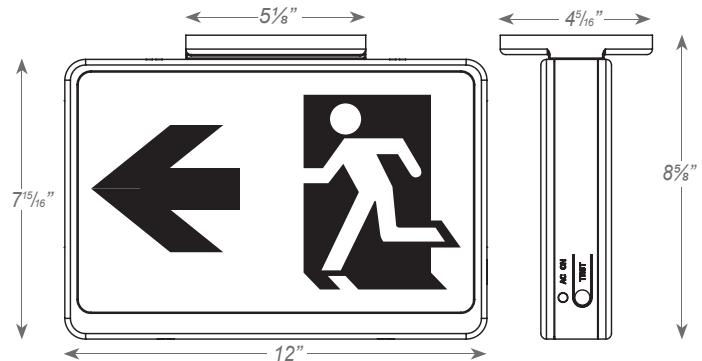

ORDERING INFORMATION

Sample Part Number: **RMEZXTEU-2-W**

MODEL	No. of FACES	HOUSING COLOR	BATTERY	OPTIONS		
RMEZXTEU	2	Universal Single/ Double Face	W White B Black	BLANK EM	AC Battery Backup	SDT Self-diagnostics

Economy Plastic Edgelit Exit Sign

STANDARD



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.
- UV-stabilized acrylic edgelit panel provides consistent, uniform illumination.
- Universal Single/Double face utilizes factory installed silver mylar background panel and stick-on mylar sheet.

ELECTRICAL

- Dual 120/277 voltage standard.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green - normal, Red - check battery).

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white, black or silver powder-coated finishes.
- Thermoplastic recessed-mount trim assembly is easily detachable from below, providing access to the housing. Available in white, black or silver powder-coated finishes.
- Self-adhesive Chevron appliques and guide template provided for directional indication.



MOUNTING

- Plastic mounting canopy included for top, end or back mount of the Surface-version sign.
- Accessory offered (order separately) for a quick surface to recessed mount conversion in the field
- Bar hangers included with Recessed-version for drywall or drop ceiling mount installations.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
PELX	1.3	1.3	0.17	0.17

ORDERING INFORMATION

Sample Part Number: **PELXRMWEM**

MODEL	No. of FACES	LETTER COLOR	PANEL	HOUSING COLOR	BATTERY	ACCESSORIES (order separately)
PELX	(blank) Universal Single/Double Face	R Red G Green RG Red/Green	M Mirror	W White B Black S Silver	(blank) AC-Only EM Battery Backup	PRELX-KIT X = W for White B for Black S for Silver Recessed-mount Conversion kit

Thermoplastic LED Edgelit Exit Sign

STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.

ELECTRICAL

- Dual 120/277 voltage standard. Optional multi-tap 208/220/240V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Push-to-test switch for mandated code compliance testing.
- 4.8V long life maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top, end or back mount.

HOUSING

- Injection-molded, engineering grade 5VA, flame retardant, high-impact resistant thermoplastic housing in white or black finish.
- Self-adhesive chevron appliques and guide template provided for directional indication.

ORDERING INFORMATION


OPTIONS

- Custom: Signs available with requested 'special' wording.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- SPV: UL Listed for special voltage option.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery is pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

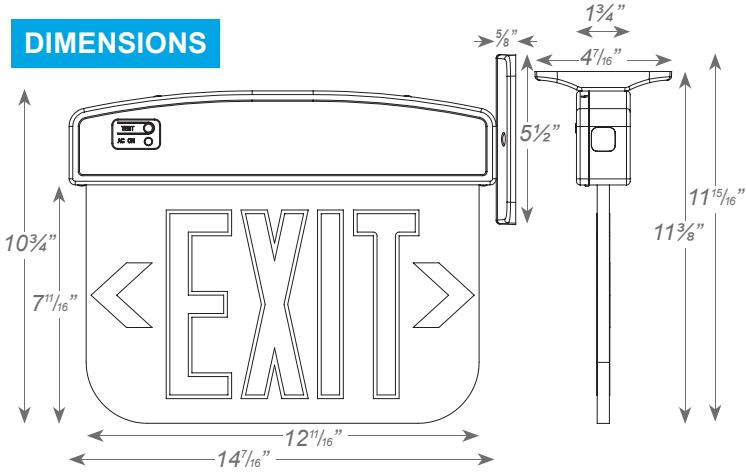

Sample Part Number: PLELRXTEU 1 R C A EM

MODEL	No. of FACES	LETTER COLOR	PANEL	HOUSING COLOR	BATTERY	OPTIONS
PLELRXTEU	1	R	C	W	AC Only	SDT
	1	G	M	B	Battery Backup	SPV
	2		W	A	EM	Custom

1. With single face only
 2. Not available with SDT
 3. Available in EM units only
 4. Available in AC units only

Aluminum LED Edgelit Exit Sign

STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.

ELECTRICAL

- Dual 120/277 voltage standard. Optional multi-tap 208/220/240 voltage available.
- Charge rate power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top, end or back mount.

HOUSING

- Premium-grade, extruded aluminum housing (also available in black or white powder-coated finishes).
- Self-adhesive chevron appliques and guide template provided for directional indication.

ORDERING INFORMATION

Sample Part Number: **ELXTEU-1-R-M-W-EM-USA**

MODEL	No. of FACES	LETTER COLOR	PANEL	HOUSING COLOR	BATTERY	OPTIONS			
ELXTEU	1	Single Face	R	Red	C Clear	W White	AC Only	SDT	Self-diagnostics ³
	2	Double Face	G	Green	M Mirror	B Black	Battery Backup	Custom	Custom Wording
					W White	A Aluminum		2C	Dual circuit Operation ⁴
								USA	Assembled in USA
								SPV	208/220/240 Volt

NOTES:

- With single face only
- Not available with SDT
- Available only with EM units
- Available only with AC units




OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- Custom: Signs available with requested 'special' wording.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- SPV: UL Listed for special voltage option.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

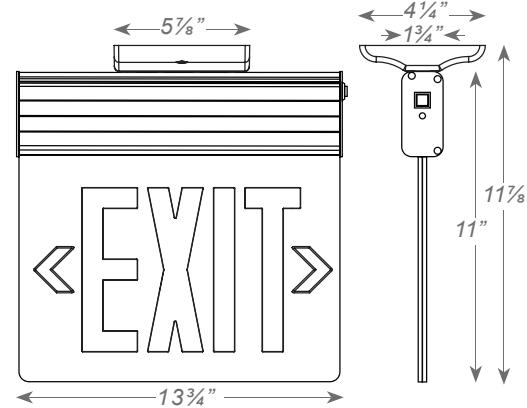

Recessed Aluminum LED Edgelit Exit Sign

STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.

ELECTRICAL

- Dual 120/277 voltage standard. Optional multi-tap 208/220/240 voltage available.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Compatible with drywall or drop ceiling mount installations. Bar hangers included.
- Wall mount capability optional.

HOUSING

- Premium-grade, extruded aluminum housing.
- Extruded aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance. Available in black or white powder-coated finishes.
- Self-adhesive chevron appliques and guide template provided for directional indication.

ORDERING INFORMATION




OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- Custom: Signs available with requested 'special' wording.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- SPV: UL Listed for special voltage option.
- WM: Allows for the unit to be wall recessed mounted.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

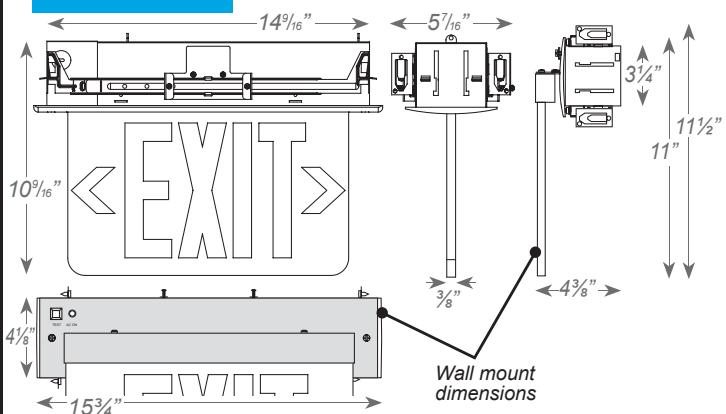

Sample Part Nu

RELZXTE-1-R-C-W-EM-USA

MODEL	NO. OF FACES	LETTER	PANEL	TRIM PLATE	BATTERY	OPTIONS
RELZXTE	1	Single Face	R Red	C Clear ¹	W White	Blank
	2	Double Face	G Green	M Mirror	B Black	EM
Notes:						
1. With Single face only						Custom
2. Not available with SDT						Custom Wording
3. Available only with EM units						USA
4. Available only with AC units						Assembled in USA
						SDT
						Self-diagnostics ³
						2C
						Dual circuit ⁴
						SPV
						208/220/240 Volt, 50/60Hz ²
						WM
						Wall Mount ¹

Die-Cast Aluminum Exit Sign



STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Premium-grade, die-cast aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C-120V/2C-277V: Dual circuit option on the AC-only unit enables it to be connected to two different power supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

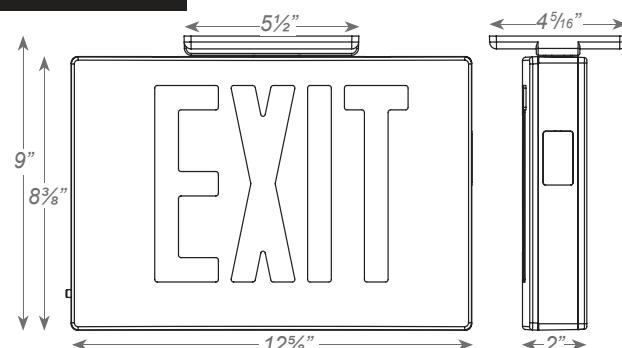

ORDERING INFORMATION

Sample Part Number: KXTEU1RBAEM

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	FACE PANEL	BATTERY	OPTIONS
KXTEU Special voltage options available. Check with your Best Lighting Representative.	1	Single Face	R Red	W White	W White (blank)	AC-Only SDT Self-Diagnostics ¹
	2	Double Face	G Green	B Black	B Black EM	Battery Backup 2C-120 Dual Circuit with 120V input ²
	3	Universal Single/Double Face		A Aluminum	A Aluminum	2C-277 Dual Circuit with 277V input ²

¹ Available only with EM units.

² Available only with AC units.

Thin Die-Cast LED Exit Sign

STANDARD



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 2.4V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING


- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout chevron directional indicators.
- Quick-snap face plate closure.
- Specification-grade, low profile thin aluminum die-cast design.
- Available specifically in single or double face only.



WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

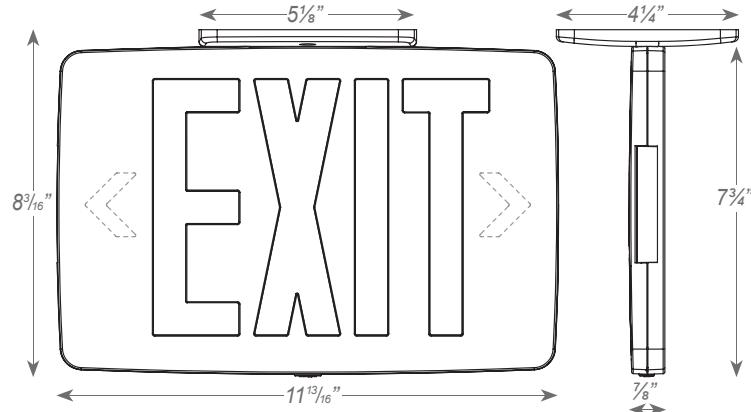

ORDERING INFORMATION

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY
KZXTEU	1	R Red	W White	Blank AC-Only
	2	G Green	B Black	EM Battery Back-up
			A Aluminum	

Steel LED Exit Sign



STANDARD



OPTIONAL

ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Field selectable steel knockout chevron directional indicators.

ORDERING INFORMATION

Special voltage options available. Check with your Americanlite Representative.

¹ Available only with EM units.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

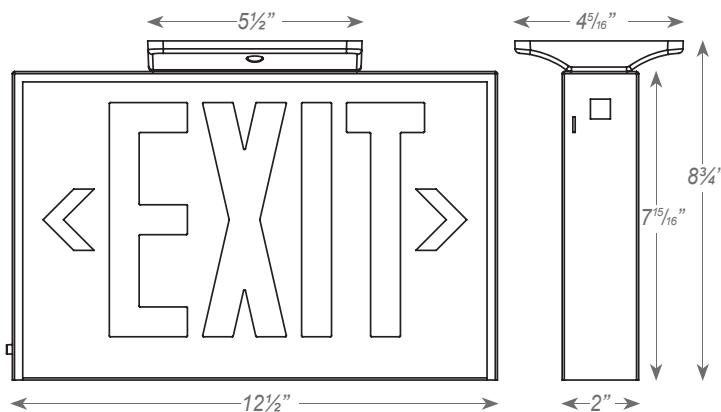

Sample Part Number: SXTEU-2-R-W-EM

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
SXTEU	1 Single Face 2 Universal Single/ Double Face	R Red G Green	W White B Black	Blank AC Only Battery Backup	SDT Self-diagnostics ¹

New York City Approved Aluminum LED Edgelit Exit Sign

STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red LED.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.
- New York City compliant 8" EXIT letters.

ELECTRICAL

- Dual 120/277 voltage standard. Optional multi-tap 208/220/240 voltage available.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top, end or back mount.

HOUSING

- Premium-grade, extruded aluminum housing (also available in black or white powder-coated finishes).
- Self-adhesive chevron appliques and guide template provided for directional indication.

ORDERING INFORMATION

Sample Part Number: NYELXTEU-1-R-C-A-EM




OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- SPV: UL Listed for special voltage option.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

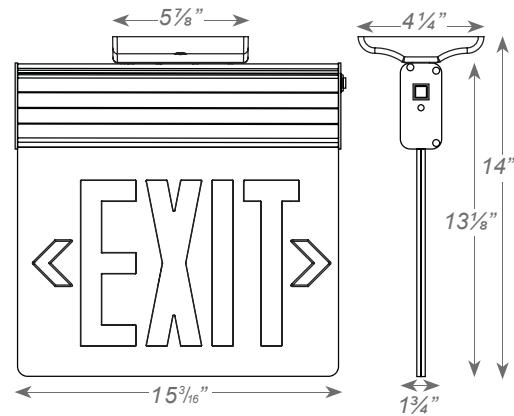¹ With single face only.² Not available with SDT options.³ Available only with EM units.

MODEL	NO. OF FACES	LETTER COLOR	PANEL	HOUSING COLOR	BATTERY	OPTIONS
NYELXTEU	1	Single Face	R	Red	C Clear	W White
	2	Double Face			M Mirror	B Black
					W White	A Aluminum

New York City Approved Diecast Aluminum Exit Sign

STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life red LED.
- New York City approved 8" EXIT letters.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Premium-grade, aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout chevron directional indicators.
- Unique design allows double face conversion in the field.
- Quick-snap face plate closure.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

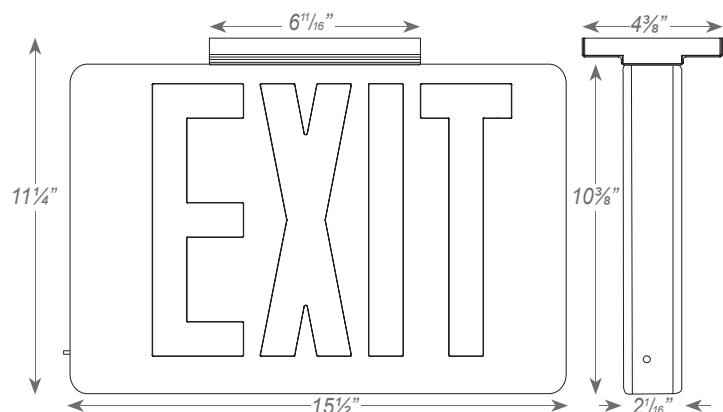

ORDERING INFORMATION

Sample Part Number: NYKXTEU-1-R-B-A-EM

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	PANEL	BATTERY	OPTIONS
NYKXTEU	1	R	W	W	Blank	SDT
	2	Red	B	Black	AC Only	2C
	3	Universal Single/ Double face	A	Aluminum	Battery Backup	Self-diagnostics ¹ Dual circuit ²

¹ Available in EM units only² Available in AC units only

New York City Approved Recessed Aluminum LED Edgelit Exit Sign

STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red LED.
- UV-stabilized, ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.
- New York City compliant 8" EXIT letters.

ELECTRICAL

- Dual 120/277 voltage standard. Optional multi-tap 208/220/240 voltage available.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Compatible with drywall or drop ceiling mount installations. Bar hangers included.
- Wall mount capability optional.

HOUSING

- Premium-grade, extruded aluminum housing.
- Extruded aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance. Available in black or white powder-coated finishes.
- Self-adhesive chevron appliques and guide template provided for directional indication.

ORDERING INFORMATION




OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- SPV: UL Listed for special voltage option.
- WM: Allows for the unit to be wall recessed mounted.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

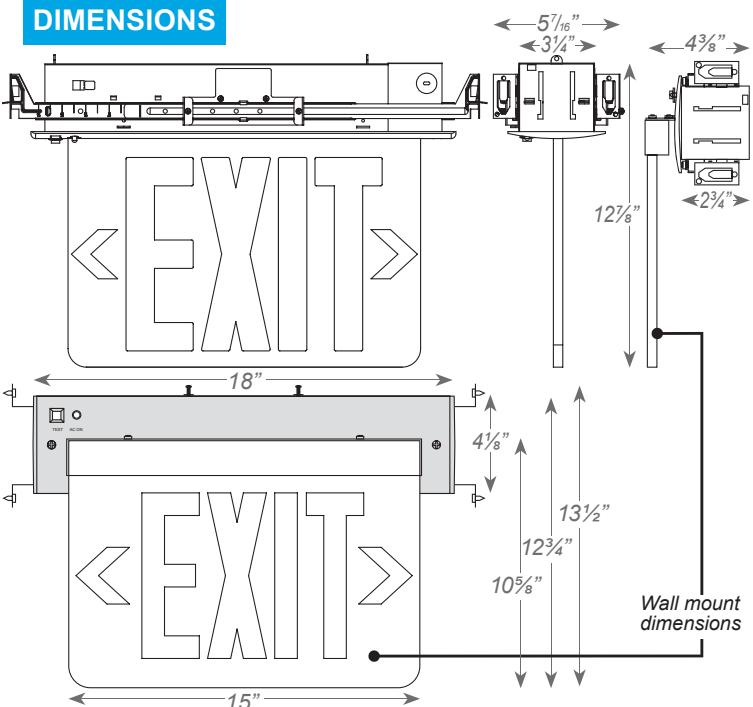

Sample Part Number: NYRELZXT-1-R-C-A-EM

MODEL	No. of FACES		LETTER	PANEL	TRIM PLATE	BATTERY		OPTIONS				
NYRELZXT	1	Single Face	R	Red	C	Clear ¹	W	White	Blank	AC Only	SDT	Self-diagnostics ³
Notes:	2	Double Face			M	Mirror	B	Black	EM	Battery Backup	SPV	208/220/240 Volt, 50/60Hz ²

1. With single face only

2. Not available with SDT options

3. Available on EM units only

New York City Approved Steel LED Exit Sign

STANDARD



ILLUMINATION

- Ultra bright, energy efficient, long life Red LED.
- New York City compliant 8" EXIT letters.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.
- Top and side K/O provided for conduit feed applications.


HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.
- Field removable steel knockout chevron directional indicators.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

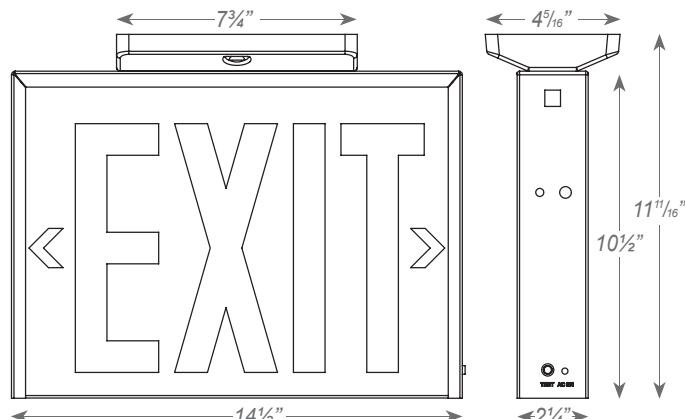

ORDERING INFORMATION

Sample Part Number: NYXTEU-3-R-W-EM

MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		BATTERY	
NYXTEU	1	Single Face	R	Red	W	White	Blank	AC Only
	2	Double Face			B	Black	EM	Battery Backup
	3	Universal Single/ Double Face						

Chicago Approved Recessed Edgelit Aluminum Exit/Stairs Signs

STANDARD



ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- UV stabilized, silk screened acrylic panels provide consistent, uniform illumination.

ELECTRICAL

- Dual 120V/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Compatible with drywall or drop-thru ceiling mount installations.
- Wall mount capability optional.

HOUSING

- Premium-grade, extruded aluminum housing.
- Extruded aluminum trim assembly is easily detachable, providing accessibility for service or maintenance. Also available in optional white finish.
- Single or double face configurations.

ORDERING INFORMATION

Wall Mount option is shown in image below.




OPTIONS

- WM: Wall mount.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL listed for damp locations (0° – 50°C).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago sign and plenum requirements.
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

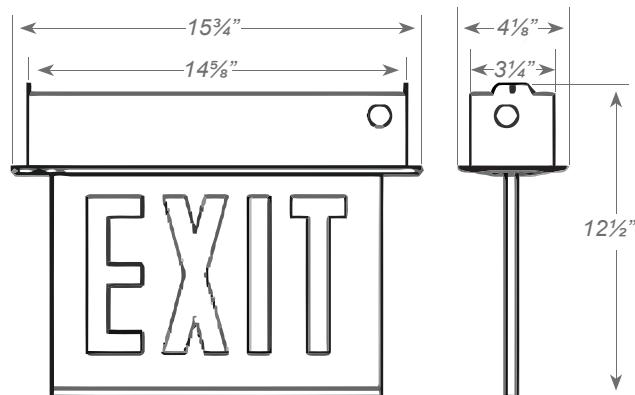

Sample Part Number: CARELZXTE1RWAEM-NA

MODEL	NO. OF FACES	LETTER	TRIM PLATE	BATTERY	SIGNAGE / DIRECTIONAL ARROWS	OPTIONS
CARELZXTE	1	Single Face	RW	Red On White	A Aluminum (blank) AC-Only	-NA Exit No Arrow
	2	Double Face			W White EM Battery Backup	-S-NA Stair No Arrow -DA Exit Double Arrow -S-DA Stair Double Arrow -RA ¹ Exit Right Arrow -S-RA ¹ Stair Right Arrow -LA ¹ Exit Left Arrow -S-LA ¹ Stair Left Arrow -LARA ² Exit Left/Right Arrow -S-LARA ² Stair Left/Right Arrow

¹ Available in single face configuration only.

² Available in double face configuration only.

Chicago Approved Steel Exit/Stair Sign

STANDARD



ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.

ELECTRICAL

- Universal 120V - 277V voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal knockout pattern on backplate for wall mount.

HOUSING


- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.



WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL listed for damp locations (0° – 50°C).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

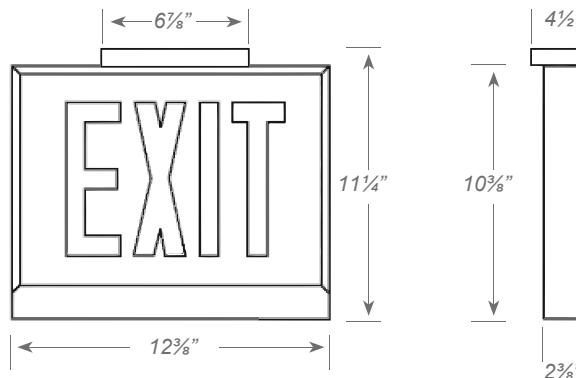

ORDERING INFORMATION

Sample Part Number: CAXTEU1RWEM-NA

MODEL	NO. OF FACES	LETTER	HOUSING	BATTERY	SIGNAGE / DIRECTIONAL ARROWS	
CAXTEU	1	Single Face	R Red On White	W White (blank)	AC-Only	-NA Exit No Arrow
	2	Universal Single/Double Face	B Black	EM	Battery Backup	-S-NA Stair No Arrow -DA Exit Double Arrow -S-DA Stair Double Arrow -RA ¹ Exit Right Arrow -S-RA ¹ Stair Right Arrow -LA ¹ Exit Left Arrow -S-LA ¹ Stair Left Arrow -LARA ² Exit Left/Right Arrow -S-LARA ² Stair Left/Right Arrow

¹ Available in single face configuration only.

² Available in double face configuration only.

Chicago Approved Edgelit Aluminum Exit/Stair Signs

STANDARD



ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.
- UV stabilized, silk screened acrylic panels provide consistent, uniform illumination.

ELECTRICAL

- Dual 120V/277 voltage.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Die-cast aluminum mounting canopy provided for universal top, end or back mount.

HOUSING

- Premium-grade, extruded aluminum housing (also available in optional white powder-coated finish).
- Single or double face configurations.

ORDERING INFORMATION

Sample Part Number: CAELXTEU1RWAEM-NA											
MODEL	No. of FACES		LETTER		HOUSING		BATTERY		SIGNAGE / DIRECTIONAL ARROWS		
CAELXTEU	1	Single Face	RW	Red On White	A	Aluminum	(blank)	AC-Only	-NA	Exit No Arrow	
	2	Universal Single/Double Face			W	White	EM	Battery Backup	-S-NA	Stair No Arrow	

¹ Available in single face configuration only.


² Available in double face configuration only.



WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL listed for damp locations (0° – 50°C).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

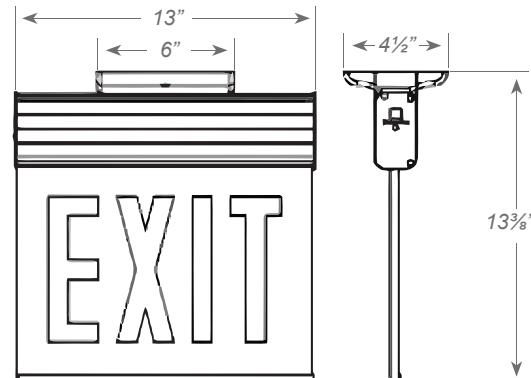

Compact Wet Location LED Exit Sign

STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Polycarbonate mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure with engineering grade silicone gasket.
- Top and side K/O's provided for conduit feed applications.
- EZ snap-out chevron directional indicators.

ORDERING INFORMATION

Special voltage & SALIDA face plate options available. Check with your Americanlite Representative.

¹ Available only with EM units.

² Available only with AC units




OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.
- Custom: Signs available with requested "special" wording.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (-20°C – 50°C).

DIMENSIONS

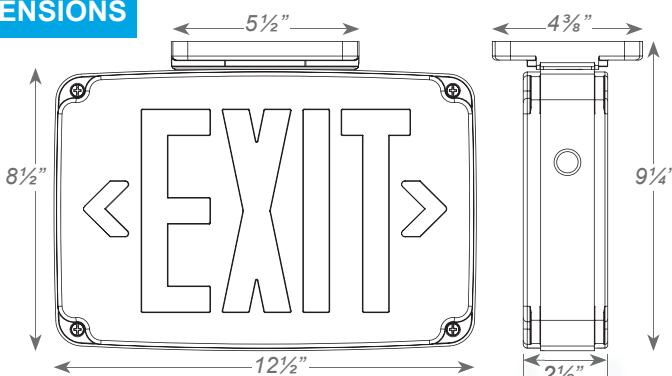

Sample Part Number: WLEZXTEU-1-R-W-EM-CW

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY			OPTIONS	
WLEZXTEU	1	R Red	W White (with white faceplate)	Blank	AC Only	CW	Cold Weather (standard)	SDT Self-diagnostics ¹
	2	G Green	B Black (with black faceplate)	EM	Battery Backup			TP Tamper-Proof
			G Gray (with white faceplate)				2C Dual circuit ²	Custom Custom Wording

NEMA4X/NSF Exit Sign



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Polycarbonate mounting canopy included for top or end mount.

HOUSING

- Housing is reinforced polycarbonate construction in white or black finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockout's provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- 2C-120V/2C-277V: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different supplies at the same time.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress protection.
- NEMA4X and NSF rated.
- Certified to CEC under Title 20 Regulations.
- UL certified for use in food service operations.
- UL listed for wet locations (-20°C – 50°C).

DIMENSIONS

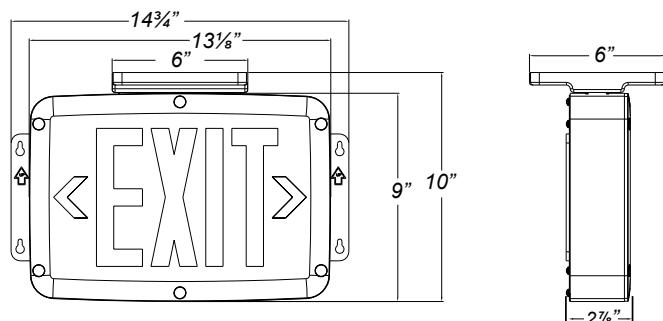

ORDERING INFORMATION

Sample Part Number: INDWLEZU1RBEM-SDT

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS					
INDWLEZU	1 2	Single Double	R G	Red Green	W B	White Black	(blank) EM	AC-Only NiCd Battery	SDT 2C-120 2C-277 TP	Self-Diagnostics ¹ Dual Circuit With 120V Input ² Dual Circuit With 277V Input ² Tamper-Proof

¹ Available in EM units only.² Available in AC units only.

Hazardous Location Exit Sign



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Die-cast mounting brackets provided for surface wall-mount installation.
- Pre-installed conduit hub for conduit and pendant-mount installations.

HOUSING

- Housing is fiberglass reinforced polycarbonate construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- EZ snap-out Chevron directional indicators.



OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.


WARRANTY / LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- Meets UL924, UL844, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress Protection.
- Rated for Class 1, Division 2, Groups A, B, C, & D.
- Certified to CEC under Title 20 Regulations.
- UL listed for wet locations (-20°C – 50°C).

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120	277	120V	277V
HLWLEZU-RED/GREEN/EM/SDT	3.0	3.0	0.03	0.02

DIMENSIONS

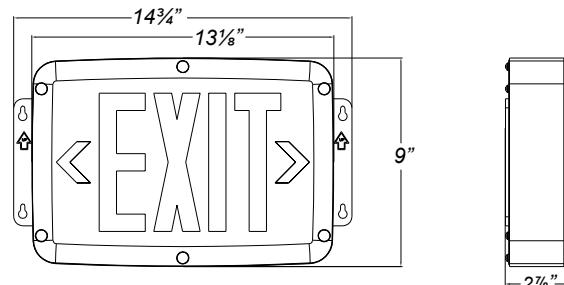

ORDERING INFORMATION

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS			
HLWLEZU	1 2	Single Double	R G	Red Green	G (blank) EM	Gray AC-Only NiCd Battery	SDT TP	Self-Diagnostics ¹ Tamper-Proof

¹ Available in EM units only.

Sample Part Number: HLWLEZU1RGEM

Lightpipe LED Exit & Emergency

STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient white LED emergency lighting.
- 4.5 (36 LEDs x 0.125 watts) per light pipe. 184 lumens / head.
- Adjustable high performance, smooth, chrome-plated, metallized reflector and acrylic, UV-stabilized "Light Pipe" lens for optimal light distribution.
- Long life, energy efficient Red or Green LED Exit sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED Light Pipe for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capable standard.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finishes.
- EZ snap-out chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- Custom: Signs available with requested "special" wording.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

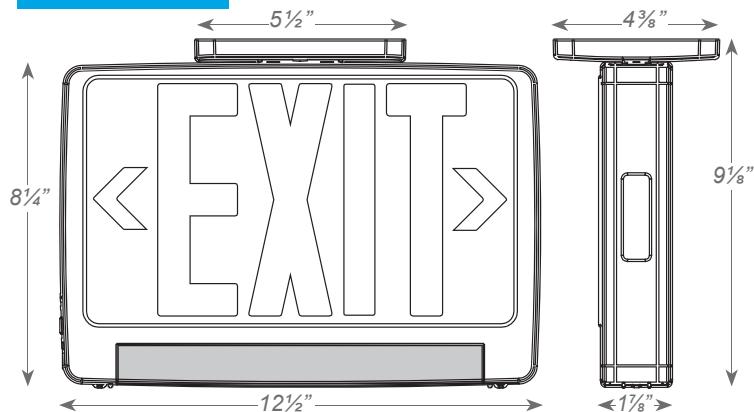

ORDERING INFORMATION

Special voltage & SALIDA face plate options available. Check with your Americanlite Representative.

MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		OPTIONS	
CLPU	1	Single Face	R	Red	W	White	Remote Capable (standard)	SDT
	2	Universal Single/Double	G	Green	B	Black		C Custom Wording

Sample Part Number: CLPU-1-R-W-RC

All LED Exit & Emergency Combo

STANDARD



OPTIONAL



ILLUMINATION

- Long lasting, efficient ultrabright white LED lampheads.
- 1 watt (8 LEDs x 0.125W) per head. 45 lumens / head.
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Long life, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity option available.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.


OPTIONS

- HL: 12-LED heads provide increased center-to-center spacing (1.5W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 40°C).

DIMENSIONS

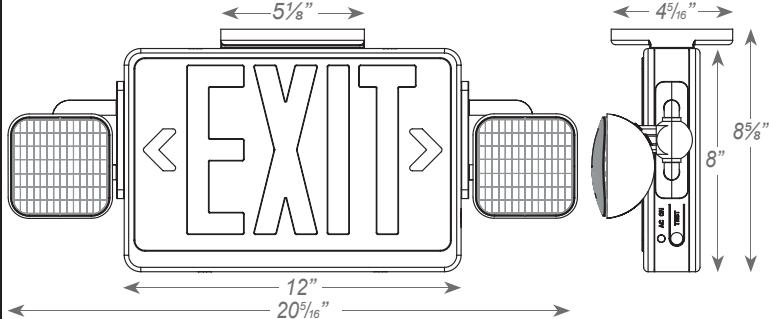

ORDERING INFORMATION

Special voltage & SALIDA face plate options available. Check with your Americanlite representative.

Sample Part Number: LEDCXTEU-1-R-W						
MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS		
LEDCXTEU	1	R Red	W White	RC	Remote Capacity	
LEDCSXTEU (Salida)	2	G Green	B Black	HL	High Lumen	
				SDT	Self-diagnostics	
				USA	Assembled in USA under the UL "split-inspection" process	

Low Profile All LED Exit & Emergency Combo



STANDARD



OPTIONAL



ILLUMINATION

- Adjustable long lasting, efficient ultra bright white LED lamp heads.
- One, 0.5W white LED per lamp head. 42 lumens per head.
- Unique all inclusive lamp, reflector and lens assembly.
- Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap thermoplastic mounting canopy included – provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.


OPTIONS

- SPV: UL Listed for special voltage option.
- HL: Provides increased center-to-center spacing (2.0W per head).
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.
- RC: Remote capacity of up to 1.0 watts.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL Listed for damp locations (0°C – 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

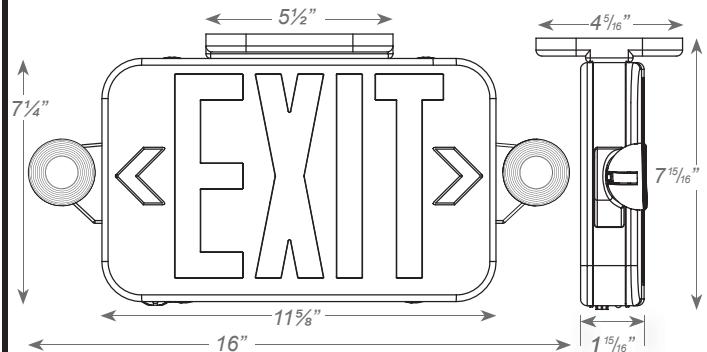

ORDERING INFORMATION

Sample Part Number: CEU3RW

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS	
CEU	3	Universal Single/Double Face	R Red G Green RG Red/Green	W White B Black	RC Remote Capacity ¹ HL High Lumen LED ¹ SDT Self-Diagnostics ² SPV 120/230 Volt 50/60Hz ²
NOTES:					
¹ -HL and -RC options cannot be combined. 0.5W of remote capacity available standard with -HL option					
² Not available with RG units.					

Thin Exit & Emergency Combo

STANDARD



OPTIONAL



ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- One 1.1W white LED per lamphead. 52 lumens / head.
- Unique all-inclusive lamp, reflector and lens assembly.
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing.
- Long life ultra-bright, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.



HOUSING

- Specification-grade, low profile thin plastic design.
- Patent-pending, field selectable universal single/double face configuration.
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- EZ snap-out chevron directional indicators.


OPTIONS

- HL: Provides increased center-to-center spacing (2.0W per head).
- RC: Remote capacity of up to 2.0 watts.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 regulations.

DIMENSIONS

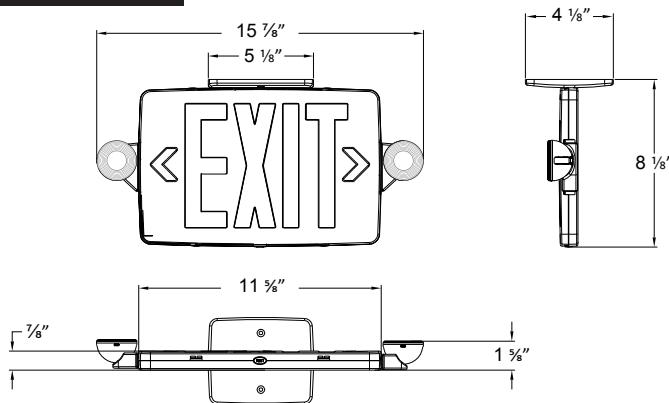

ORDERING INFORMATION

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS ¹	
CTXTEU	3	Universal Single/ Double Face	R Red G Green	W White B Black	HL High Lumen RC Remote Capacity

NOTES:

¹ -HL and -RC options cannot be combined.

Sample Part Number: CTXTEU3RW

Reduced Profile All LED Exit & Emergency Thermoplastic Combo

STANDARD



OPTIONAL



ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED EXIT sign illumination.
- Ultra-bright, energy efficient, long-life White LED adjustable LED lamp heads provide up to 30-ft center-to-center spacing with 3-ft path of egress at 10-ft mounting height.
- 1.5 watt (3 LEDs x 0.50 watt) per head. 77 lumens per head.
- Unique all-inclusive lamp, reflector and lens assembly.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Snap-out Chevron directional indicators.

ORDERING INFORMATION

Sample Part Number: **CEMGWRC**




OPTIONS

- RC: Remote capacity of 2.5 watts.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

WARRANTY / LISTING

- Five-year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

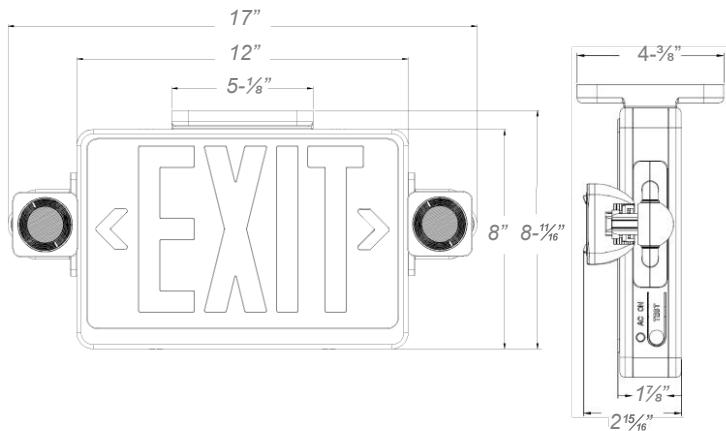

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS
CEM	Universal Single/ Double Face	R Red G Green	W White B Black	RC SDT Remote Capacity Self-Diagnostics

Low-profile Wet location Exit & Emergency Combo

STANDARD



OPTIONAL



ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads.
- 1.0W (1 LEDs x 1.0 watt) per head.
- Adjustable LED lamp heads provide up to 18-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Unique LED indicator light alerts occupant on battery condition (Red-normal, Off-check battery).
- 3.6V long life, maintenance free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lampheads for minimum 90-minute emergency illumination.
- Fully automatic solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing

HOUSING

- 5VA flame retardant, UV stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV stabilized polycarbonate clear lens.
- Corrosion resistant enclosure with engineering grade silicone gasket.
- Knockouts provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.



MOUNTING

- Polycarbonate mounting canopy included for top or end mount
- Universal K/O pattern on back plate for wall mount.


OPTIONS

- CW: Optional high capacity battery for extreme cold temperature applications (-20°C – 50°C).
- RC: Remote capacity of up to 2.0 watts.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for wet locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

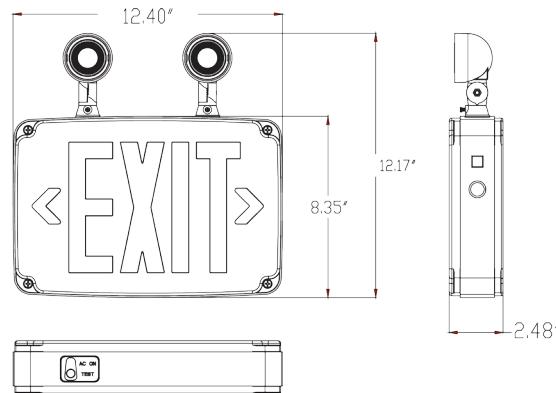

ORDERING INFORMATION

Sample Part Number: WLCEM1RGW

MODEL	No. of FACES		LETTER COLOR		HOUSING COLOR		OPTIONS	
WLCEM	1	Single Face	RG	Red/Green (Field-selectable)	W	White	CW	Cold Weather ¹
	2	Double Face			B	Black		
	(blank)	Universal Single/Double Face			G	Gray (with white faceplate)	TP	Tamper Proof Screws

Note:

¹: Not available together

Die-Cast Aluminum LED Exit & Emergency Combo

STANDARD



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.
- High performance premium grade, ultra bright white LED lamps.
- 3W (1 LED x 3 watts) per head. 86 lumens / head.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- 8.4V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity available as an option.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.




HOUSING

- First premium grade die-cast combo in the market. Unique new design provides spec grade EXIT sign with LED lamp heads in one low profile housing.
- Premium-grade, extruded aluminum housing (also available in black or white powder-coated finishes).
- Field selectable knockout chevron directional indicators.
- Quick-snap face plate closure.
- Unique design allows double face conversion in the field.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

DIMENSIONS

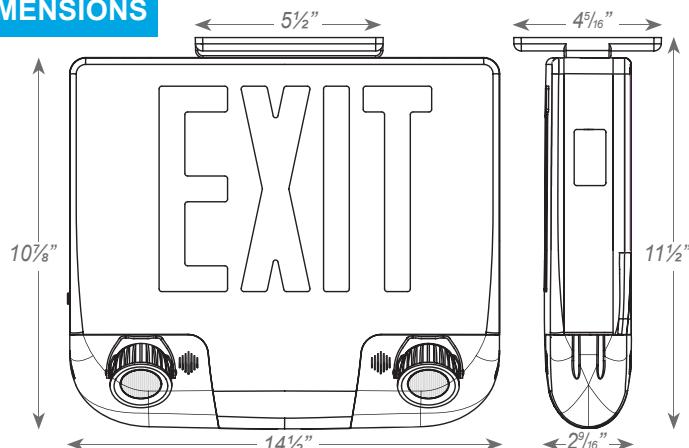

ORDERING INFORMATION

Sample Part Number: CKXTEU-1-R-A-A-EM

Special voltage options available. Check with your Americanlite Representative.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	FACE PLATE	BATTERY	OPTIONS
CKXTEU	1	R Red	W White	W White	EM Battery Backup	RC Remote Capacity
	2	G Green	B Black	B Black		
	3	A Aluminum	A Aluminum			

Wet Location All LED Exit & Emergency Combo

STANDARD



OPTIONAL



ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads.
- 3.6W (3 LEDs x 1.2 watt) per head. 219 lumens / head.
- Adjustable LED lamp heads provide optimal center-to-center spacing.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 6V long life, maintenance free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lampheads for minimum 90-minute emergency illumination.
- Fully automatic solid state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Die-cast aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

- 5VA flame retardant, UV stabilized polycarbonate in white, black or gray finish.
- High-impact resistant, UV stabilized polycarbonate clear lens.
- Corrosion resistant enclosure with engineering grade silicone gasket.
- Top and side K/O's provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.
- CW: Optional internal heater and battery blanket for extreme cold temperature applications (-20°C – 50°C).
- Custom: Signs available with requested "special" wording.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL listed for wet locations (0°C – 50°C).

DIMENSIONS

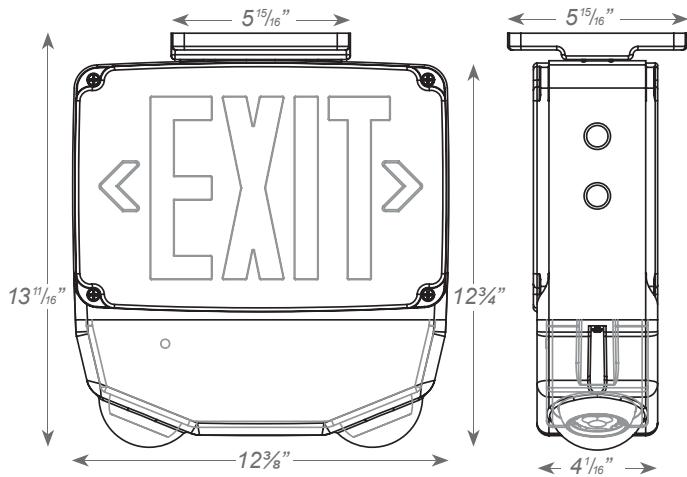

ORDERING INFORMATION

Sample Part Number: CWLEZXTEU-1-R-W

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	OPTIONS			
CWLEZXTEU	1	Single Face	R Red	W White	TP	Tamper Proof Screws	CW Cold Weather
	2	Double Face	G Green	B Black	CUSTOM	Custom Wording	RC Remote Capacity
				G Gray (with white faceplate)	SDT	Self Diagnostics	34

All LED NEMA4X/NSF Exit & Emergency Combo Emergency Combo

STANDARD



OPTIONAL



ILLUMINATION

- Two fully adjustable, ultra bright 3.3 watt high performance MR-16 base LED lamp heads for optimized center-to-center spacing. 219 lumens / head.
- Long-life, energy efficient Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 6V/12V maintenance-free, rechargeable NiCd battery (12W, 15W models).
- 6V/12V maintenance-free, rechargeable sealed lead acid battery (28W model).
- Offers 4.8W, 7.8W, 20.8W of remote capacity (6V/12V DC output) standard on the 12W, 15W and 28W models.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Universal knockout pattern on back provided with gasket for watertight seal for back mount.
- Polycarbonate mounting canopy included for top or end mount.

HOUSING

- Housing is reinforced polycarbonate construction in white or black finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- Knockout's provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- CW: Optional internal heater and battery blanket for extreme cold temperature applications (-20°C – 50°C).
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.
- NH: No lamp heads attached to the unit enabling it to be used as a remote capable EXIT sign.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Batteries prorated for two (lead acid) / five (NiCd) years.
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress protection.
- NEMA4X rated.
- UL certified for use in food service operations.
- UL listed for wet locations (0°C – 50°C on 12W / 15W and 10°C - 40°C on 28W models).

DIMENSIONS

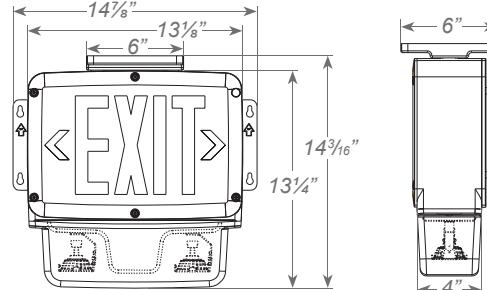

ORDERING INFORMATION

¹ Available only in 15W & 28W models.

² Available only in 12W models.

³ Available only in 12W & 15W models.

MODEL	No. of FACES	LETTER COLOR	VOLTAGE	WATTAGE	HOUSING COLOR	OPTIONS
INDCWLEZU	1	Single ¹	R Red	6 6 volts	12 12 watts	W White
	2	Double ²	G Green	12 12 volts	15 15 watts	B Black
				28 28 watts		SDT Self-Diagnostics
						CW Cold Weather ³
						TP Tamper-Proof
						NH No Heads

Sample Part Number: INDCWLEZU1R615B

New York City Approved LED Exit & Incandescent Emergency Combo

STANDARD



ILLUMINATION

- Two fully adjustable 12W, glare-free lamp heads with field installable 3rd emergency lighting head included. 189 lumens / head.
- K/Os provided on sides of unit to relocate lamp heads.
- High performance smooth metal reflector and glass lens for optimal light distribution.
- Ultra bright, energy efficient, long life Red LED.
- New York City compliant 8" EXIT letters.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting hardware provided for back surface wall mount.
- Top and side K/Os provided for conduit feed applications.

ORDERING INFORMATION

MODEL	NO. OF FACES	LETTER COLOR	HOUSING COLOR	NO. OF HEADS
CNYXTE	1 Single Face	R Red	W White B Black	3 Standard No Heads




HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Injection-molded, engineering grade, high-impact, thermoplastic heads.
- Field removable steel knockout chevron directional indicators on exit face.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

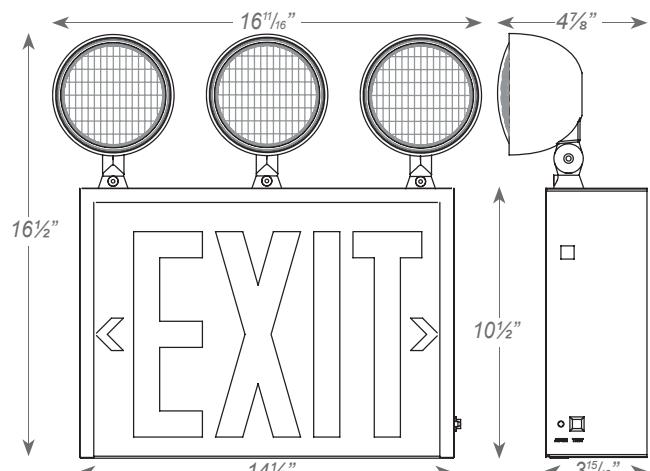

Sample Part Number: CNYXTE-1-R-W-3

Chicago Approved Steel LED Exit & Emergency Combo

STANDARD



ILLUMINATION

- Long lasting, energy efficient white LED exit sign illumination.
- Single or double face configuration.
- Two 6V 5.3W adjustable white LED lamp heads. 349 lumens / head.

ELECTRICAL

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 120 minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity option available.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.




HOUSING

- Durable 20-gauge steel construction.
- White or black finish.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery pro rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (20°C – 50°C).

DIMENSIONS

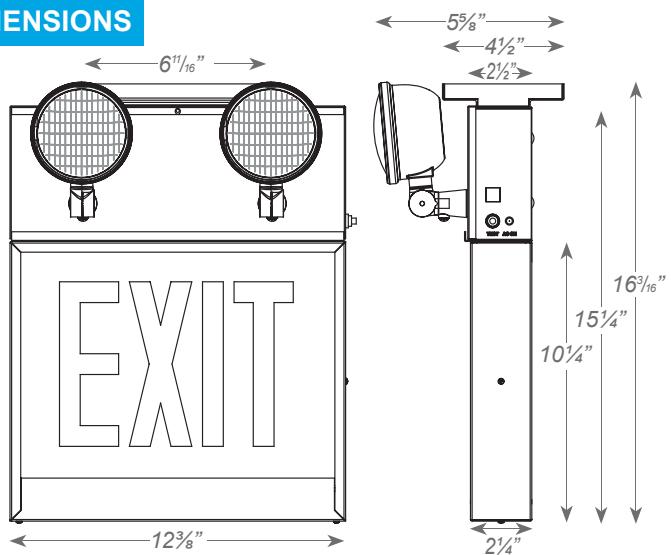

ORDERING INFORMATION

Sample Part Number: CALEDCXTEU-1-R-W

MODEL	No. of FACES	LETTER	HOUSING	OPTIONS	DIRECTIONAL ARROW					
					RC	Remote Capacity	NA	Exit No Arrow	SW-LA ¹	Stairs Left Arrow
CALEDCXTEU	1	Single Face	R	Red	W	White	DA	Exit Double Arrow	SW-NA	Stairs No Arrow
	2	Double Face			B	Black	RA ¹	Exit Right Arrow	SW-DA	Stairs Double Arrow
							LA ¹	Exit Left Arrow	SW-RA ¹	Stairs Right Arrow
							LARA ²	Exit Left/Right Arrow	SW-LARA ¹	Stairs Left/Right Arrow

Notes:

1. Available only with single face units.

2. Available only with double face units.

Rechargeable Sealed Lead Acid Batteries

STANDARD



ILLUMINATION

- *Lighting equipment*
- *Communications and electrical equipment*
- *Emergency lighting equipment*
- *Fire alarm & security systems*


FEATURES

- *Valve-regulated and safe to discharge in any position*
- *Completely sealed construction requires no special handling when shipping via surface or air*
- *Impact-resistant ABS housing*
- *Will last up to 5 Years in standby applications and 200 to 1,000 cycles in cyclic applications depending on depth of discharge*
- *Available in a variety of sizes and amp ratings*
- *Provides reliable power output in a variety of applications, resulting in greater efficiency and improved ability to recover from deep discharge*
- *Cycle or Standby use*
- *Low resistance safety feature makes the batteries easy to recharge & maximizes energy output*
- *Standard F1 or F2 "fl at lugs" type terminal*

WARRANTY / LISTING

- *Batteries are pro-rated warranted for 5 years.*

DIMENSIONS

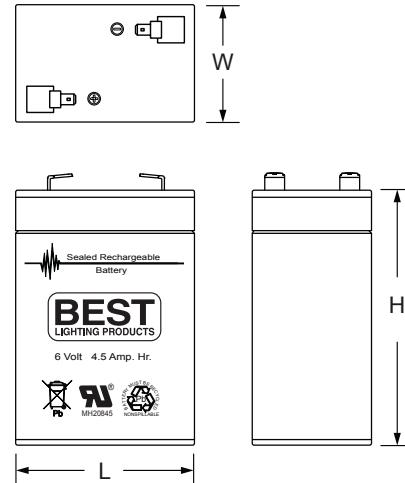

ORDERING INFORMATION

MODEL	NOMINAL VOLTAGE	NOMINAL CURRENT	LENGTH (L)	HEIGHT (H)	WIDTH (W)	WEIGHT
BL645	6V	4.5 Amp-Hr	2-3/4"	3-15/16"	1-13/16"	1.6 lbs.
BL670	6V	7.0 Amp-Hr	5-15/16"	3-11/16"	1-3/4"	2.4 lbs.
BL6100	6V	10.0 Amp-Hr	5-7/8"	3-11/8"	1-15/16"	3.4 lbs.
BL6120	6V	12.0 Amp-Hr	5-7/8"	3-11/16"	1-15/16"	4.0 lbs.

Specifications and dimensions subject to change without notice.

LED Retrofit Kits

STANDARD



**SCREW-IN
RETROFIT KIT**



HARD WIRE RETROFIT KIT

ILLUMINATION

- Kits easily convert incandescent exit signs to energy efficient LED EXIT signs.
- Ultra bright, long life Red LED.

ELECTRICAL

Hard wire:

- Dual 120/277 voltage.
- Energy usage of 2.8W per kit.

Screw-in:

- 120 voltage only.
- Energy usage of 2.8W per kit.

	INCANDESCENT	GREEN LED KIT	RED LED KIT
EXIT Energy Use	30W (15W lamp x 2)	1.4W (0.7W LED's x 2)	2.8W (1.4W LED's x 2)
"ON" Hours / Year	8760	8760	8760
Price / Kilowatt Hour	\$ 0.09	\$ 0.09	\$ 0.09
Energy Usage / Year	262,800 Watts	12,264 Watts	24,528 Watts
Annual Cost	\$ 23.65	\$ 1.10	\$ 2.21
Watt Savings / Year		250,536	238,272
Annual Savings		\$ 22.55	\$ 21.44

Example based on 9¢/KWhr


MOUNTING

- Hard wire kits come complete with mounting bracket and double-sided tape for easy installation.
- Screw-in kits are supplied with socket adapters for installation in signs with bayonet, intermediate or candelabra bases.

WARRANTY / LISTING

- Five year warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Code.

DIMENSIONS

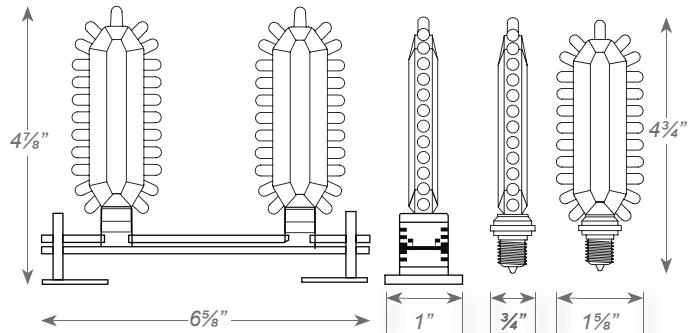

ORDERING INFORMATION

Sample Part Number: **RFXTE-3**

MODEL	KIT
RFXTE-3	Red Screw-in Kit

Remote Test Switch

APPLICATION

- RTS provides remote testing capability for SPS mini-inverter, unit equipment and exit signs. Not compatible with emergency ballasts.

ELECTRICAL

- Field selectable 120 voltage or 277 voltage.
- Power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.

MOUNTING

- Remote Test Switch can be mounted to any standard switch box.
- Suitable for wall or ceiling mount.

CONSTRUCTION

- Injection-molded, engineering grade, V-0 flame retardant mounting plate in white finish.

WARRANTY / LISTING



- Five year warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

ORDERING INFORMATION

MODEL

RTS

DIMENSIONS

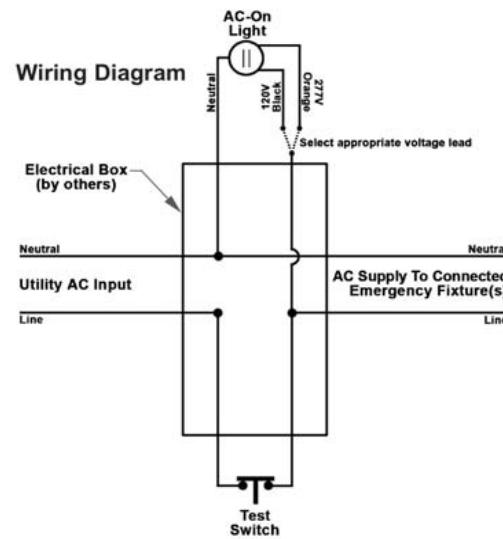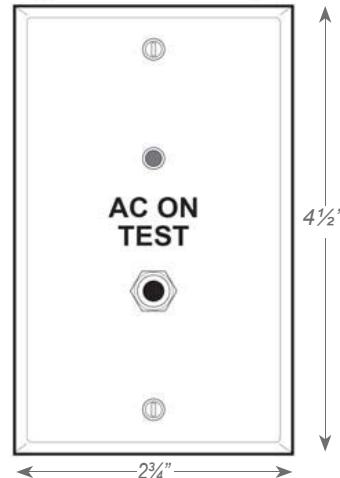

Sample Part Number: **RTS**

Indoor High Performance MR16 LED Remote Head



ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- Adjustable 3.3W lamp heads increase center-to-center spacing.

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting base plate included with mounting hardware.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.


HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

WARRANTY / LISTING

- Five year warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

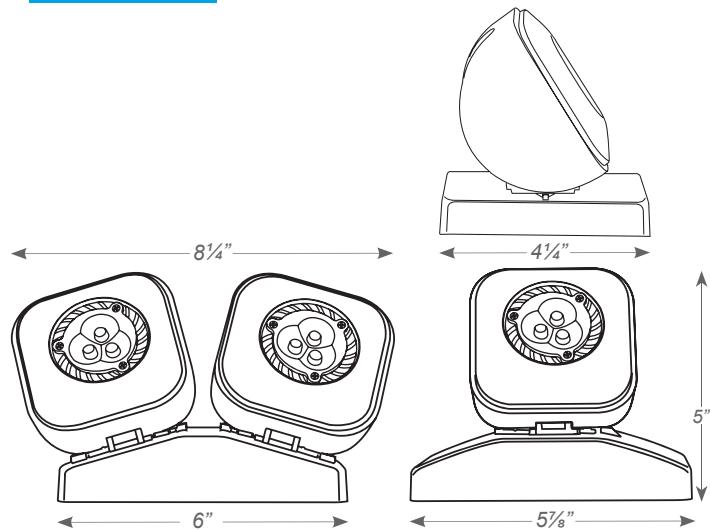

Fixture Compatibility

Reference individual unit equipment specification sheets for remote load capacity availability.

LIGHTING MODEL TYPE			
LEDTFX-2	R-5HO	TFX-2	EZXTE-RC
LEDCADXR	R-16-HO	NYDXR	CLPU-RC
RMR-16-65/125	DXR	CXTEU-RC	CALEDCXTE
	LEDCXTEU-RC	LEDR5-HO	

ORDERING INFORMATION

Sample Part Number: RH16LED-1-MV

MODEL	NO. OF HEADS	COLOR		VOLTAGE	
RH16LED	1 Single Head	Blank	White	MV	For use with 3.6V, 6V, 9.6V or 12V batteries
	2 Double Head	B	Black		

Outdoor LED Remote Head



Also available in Thermoplastic

ILLUMINATION

- Long lasting, efficient, ultra bright white LED lamp heads.
- High performance chrome-plated metallized reflector and glass lens with 8 or 12 LED's in each lamp head for optimal light distribution.
- Adjustable LED lamp heads increases center-to-center spacing.

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting base mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.


HOUSING

- Available in both engineering grade, high-impact resistant thermoplastic or premium grade die-cast aluminum housing.
- Sealed and gasketed in standard gray or optional black finish.

WARRANTY / LISTING

- Five year warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

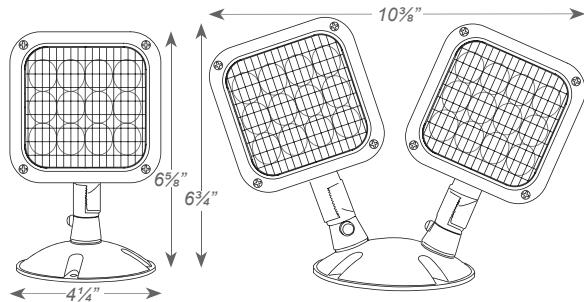

Fixture Compatibility Chart

Reference individual unit equipment specification sheets for remote load capacity availability.

MODEL TYPE	3.6V	9.6V	MV
LEDCXTEU-RC		X	X
CLPU-RC		X	X
CKXTEU-RC	X		X
LEDR-5HO	X		X
LEDTFX-2		X	X
E-1-RC	X		X
CEU-RC	X		X

ORDERING INFORMATION

Sample Part Number: RHLED-1-WP-9.6

MODEL	No. of HEADS	OPTIONS		HOUSING		VOLTAGE		COLOR		LAMP TYPE ¹			
RHLED	1	Single Head	Blank	PWP	Thermoplastic	3.6V	For use with 3.6V batteries		Blank	Gray	Blank	8 LEDs 1W	
	2	Double Head	SDT			9.6V	For use with 9.6V batteries			B	Black	HL	12 LEDs 1.5W
Notes:													

1. Wattage rating stated per head.

High-Power LED Outdoor Polycarbonate Remote Head

STANDARD



ILLUMINATION

- Ultra-bright, energy efficient, long-life White LED adjustable lamp heads provide up to 100-ft center-to-center spacing with a 6-ft path of egress at 15-ft mounting height.
- 6.0 watt (12 LEDs x 0.50 watt) per head.
- Adjustable glare-free PAR-Type lamp heads with all-inclusive lamp, reflector and lens assembly.

ELECTRICAL

- Powered from low voltage (5-15VDC) power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.


HOUSING

- Available in engineering grade, Impact-resistant polycarbonate housing.
- Sealed and gasketed in standard gray or black finish.

WARRANTY / LISTING

- Five year warranty.
- UL Listed for wet locations (-30°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

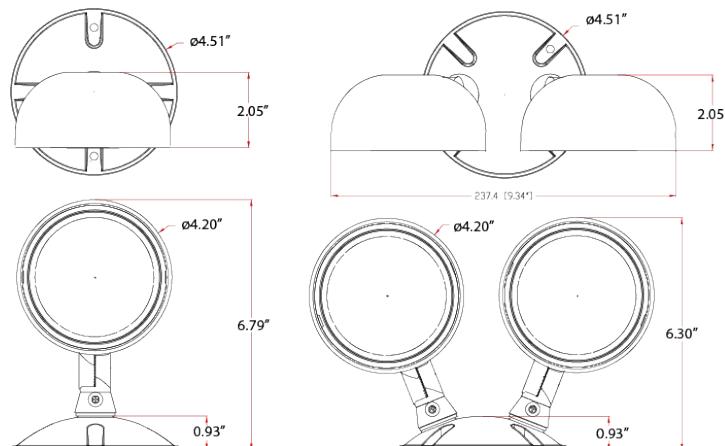

Fixture Compatibility List

Reference individual unit equipment specification sheets for remote load capacity availability.

BEST LIGHTING MODEL TYPE		
CALEDCXTE-RC	CWLEZXTE-RC	INDCWLEZ
HLCWLEZ	LEDSDXR627	HLEMR
INDEMNR	NYDXR	RMR-16-65/125
LEDXR		

ORDERING INFORMATION

Sample Part Number: **HPRL1-WP**

MODEL	No. of HEADS	COLOR	HOUSING
HPRL	1	Single Head	(blank)
	2	Double Head	B
			Gray
			Black
			WP Polycarbonate (Standard)

High-Power LED Indoor Polycarbonate Remote Head

STANDARD



ILLUMINATION

- Ultra-bright, energy efficient, long-life White LED adjustable lamp heads provide up to 100-ft center-to-center spacing with a 6-ft path of egress at 15-ft mounting height.
- 6.0 watt (12 LEDs x 0.50 watt) per head.
- Adjustable glare-free PAR-Type lamp heads with all-inclusive lamp, reflector and lens assembly.

ELECTRICAL

- Powered from low voltage (5-15VDC) power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.

HOUSING


- Available in engineering grade, Impact-resistant thermoplastic housing in standard white or black finish.



WARRANTY / LISTING

- Five year warranty.
- UL Listed for damp locations (0°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

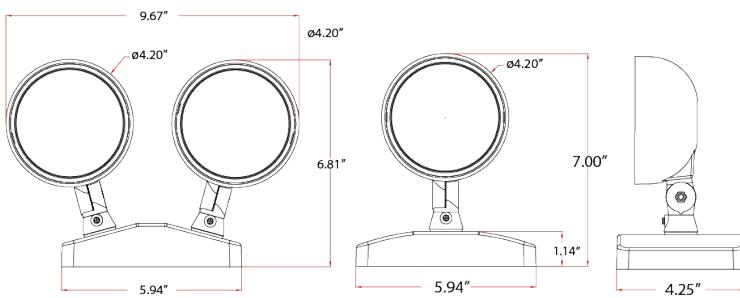

Fixture Compatibility List

Reference individual unit equipment specification sheets for remote load capacity availability.

BEST LIGHTING MODEL TYPE		
CALEDCXTE-RC	CWLEZXTE-RC	INDCWLEZ
HLCWLEZ	LEDSDXR627	HLEMR
INDEMNR	NYDXR	RMR-16-65/125
LEDXR		

ORDERING INFORMATION

Sample Part Number: **HPRL1**

MODEL	No. of HEADS	COLOR	
HPRL	1	Single Head	(blank) White
	2	Double Head	B Black

Indoor Incandescent Steel Remote Heads



ILLUMINATION

- Long lasting, efficient, wedge base incandescent or bi-pin halogen lamps.
- High performance chrome-plated metallized reflector and glass lens for optimal light distribution.
- Adjustable 6V or 12V lamp heads increase center-to-center spacing.

ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

MOUNTING

- Universal mounting base mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.


HOUSING

- Durable 20-gauge steel in white or black finish.

WARRANTY / LISTING

- Five year warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

DIMENSIONS

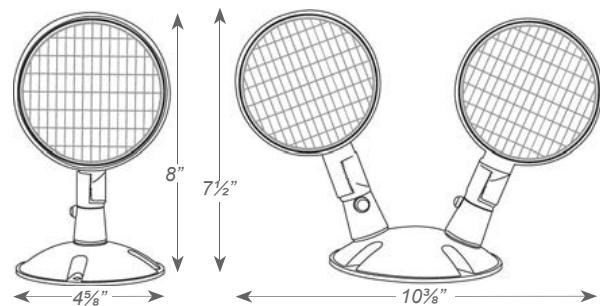

Fixture Compatibility Chart

Reference individual unit equipment specification sheets for remote load capacity availability.

MODEL TYPE	6V	12V	MODEL TYPE	6V	12V
NYDXR-50		X	TFX-2	X	
RMR-16-65	X		NYDXR-27	X	
RMR-16-125		X	EZXTE-RC	X	
R-5HO	X		CXTE-RC	X	
R-16-HO	X		DXR-125/1210		X
DXR-65/610	X		CALEDCXTE	X	
LEDCADXR	X				

ORDERING INFORMATION

Sample Part Number: **SRH-1-12V-12W**

MODEL	No. of HEADS		COLOR		VOLTAGE		WATTAGE ¹	LAMP TYPE	
SRH	1	Single Head	Blank	White	6V	For use with 6V batteries	5.4W	Blank	Wedge-base incandescent
	2	Double Head	B	Black	12V	For use with 12V batteries	7.2W 9.0W 12W	BPH ²	Bi-Pin Halogen

Notes:

1. Wattage rating stated per head.


2. Available in 12W only.



BG-3C

HOUSING MOUNTING

- High-impact resistant polycarbonate material.
- Mounting hardware provided for easy installation in the field.

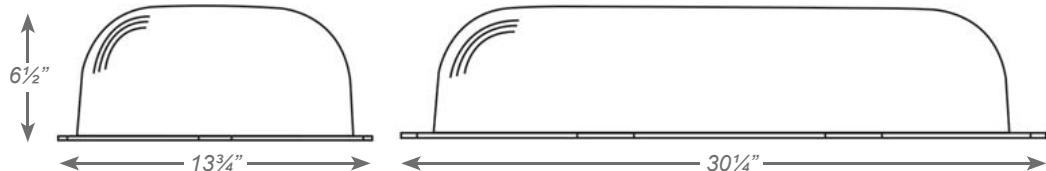




BGR-1



PCS-1



BG-1

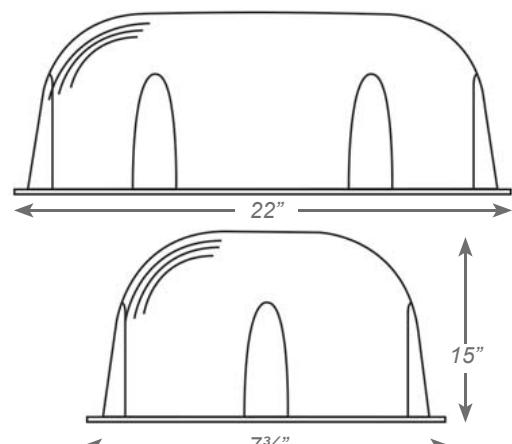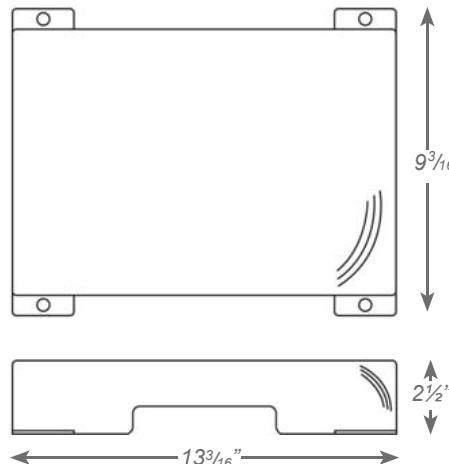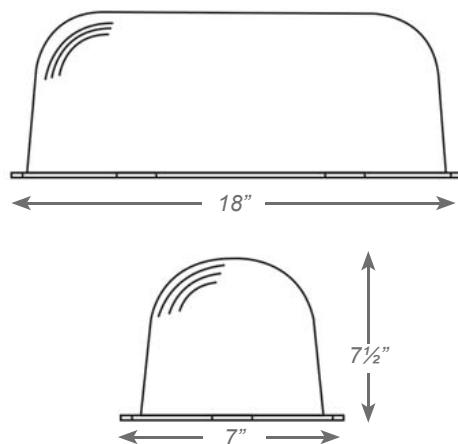


ORDERING INFORMATION

MODEL	USE WITH	DIMENSIONS
PCS-1	CLPU, EZRXTE, EZTXTE, EZXTE, KXTE, KZXTE, SLXTU, SXTE,	2 1/2" x 9-3/16" x 13 3/16"
BG-1	CA26S10, CKXTE, CLPU, DBEL, DXR, ELXTE, EZRXTE, EZTXTE, EZXTE, EZXTE-RC, KXTE, KZXTE, LEDCXTE, LEDTFX-2, NYELXTE, NYKXTE, NYXTE, PLELRXTE, SLXTU, SXTE, TFX-2, WLEZXTE, WLXTE	7 3/4" x 22" x 15"
BGR-1	R-1, R-2, R-16, R-16-HO, R5HO, RMR-16, RMR-16-WP, LEDR-2, LEDR-5HO, LEDR1	7 1/2" x 18" x 7"
BG-3C	CXTE	13 3/4" x 30 1/4" x 6 1/2"


WIRE GUARD

- Durable 9-gauge steel construction.
- Mounting hardware provided for easy field installation.

WG-1

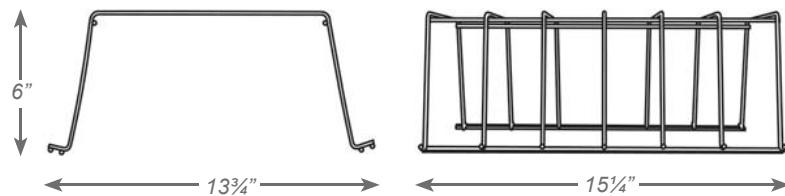

WG-3

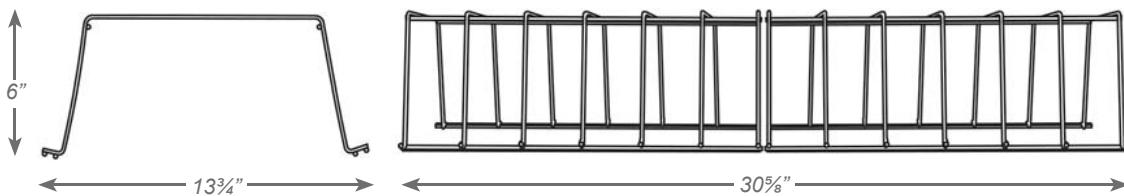

ORDERING INFORMATION

MODEL	USE WITH	DIMENSIONS
WG-1	CA26S10, CKXTE, CLPU, DBEL, EZRXTE, EZXTE, EZXTE-RC, PLELRXTE, KXTE, LEDR-1, LEDR-2, LEDR-5HO, LEDTDX-2, NYXTE, PAR-1, R-1, R-2, R-16, R-16-HO, RMR-16, RMR16-WP, SLXTU, SXTE, WLEZXTE, WLXTE	13 3/4" x 15 1/4" x 6"
WG-3	CXTE, DXR, LEDCXTE, NYELXTE, NYKXTE	13 3/4" x 30 5/8" x 6"



Warranty

Americanlite® is pleased to provide a 5 year limited warranty covering the fixtures in this catalogue. Americanlite® warrants that the fixtures comply with Americanlite's published specifications and are free from defects in materials and workmanship.

All our equipment is CE, TUV, FCC or UL approved and manufactured with approved components. Americanlite® reserves the right to change or improve the design or components of any of its products due to parts availability or changes in standards, without assuming any obligation to modify any product previously manufactured and without notice. All equipment is tested and inspected before shipment.

This warranty is void if the product is operated outside of its normal operating conditions. The foregoing warranty does not apply to failures caused by acts of God or as a result of any abuse, misuse, abnormal use, or use in violation of any applicable standard, code or instructions for use in installations, including, but not limited to, those contained in the Standards for the International Electrotechnical Commission. Americanlite® reserves and has the right to examine failed fixture to determine the cause of failure, excessive lumen depreciation and patterns of usage.
