



Linear Pro™


americanlite®

We light your world™



Linear Pro™ Series

Down / Up & Down Selectable
CCT & Power Selectable
10w - 100w
2' / 3' / 4' / 8'

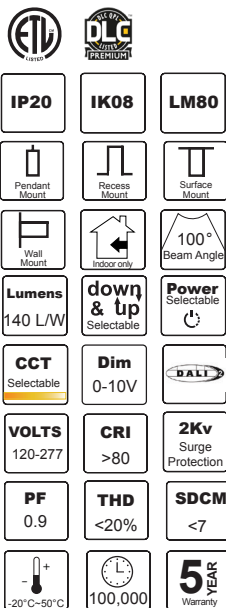

Americanlite® LED linear lighting collection is made to simply integrate into the surroundings of a place and keep the spotlight where it needs to be: the comfort and productivity of its occupants. Because there is power in simplicity, Americanlite® LED lighting fixtures are recognized for their quality, reliability, and solid performance, making Americanlite® one of the most specified brands in the lighting industry.


Linear Pro™ Series is specifically crafted to be the most versatile and powerful linear fixture in the market. Every Linear Pro™ fixture is ready for single or continuous run; we have integrated connectors allowing several fixtures in one row using only one power cable. Suspended, recessed mounting or surface mounting, no limits. But... we didn't stop there; we have elevated Linear Pro™ Series to another level.

Linear Pro™ Series offers Selectable Technology™: Power, CCT, Down and / or Up lighting selection within an easy to use multiple switching position toggles, to achieve the most precise configuration to fulfill any architectural and light level requirement.

Linear Pro™ Series is built on a heavy-duty extruded Aluminum 6063 ("architectural aluminum") 1 mm thickness, for the perfect blend of strength, weight, and thermal performance. Linear Pro™ Series utilizes a 1.2 mm frosted polycarbonate diffuser which provides an exceptional lumen output that translates to effective luxes across the area. We have incorporated premium components, adjustable aircraft cable, power cable with rubber sleeve, UL Specification Grade dimmable 0-10v driver with 2KV SP and powerful led package. Too warm or too cool? Simply toggle the CCT integrated switch to your desired setting and you are done! Whatever your application, Linear Pro™ Series are sure to give you the feel and flexibility that you need.

Linear Pro™ has a minimalist design perfect for offices, schools, retail spaces, hotels and institutional projects, looking to accommodate large footprints. The neutral, rectilinear form factor is impressive—but the energy-saving LED, advanced technology and reliable performance sets a new standard. Linear Pro™ Series produces comfortable high-quality ambient illumination that can improve occupant comfort and productivity.

Dimensions (mm)

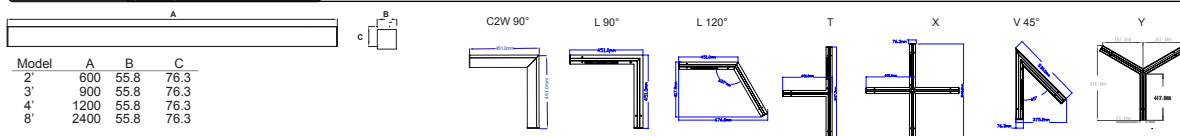

Ordering information

Item	Size	Selectable Power	Selectable 3 CCT	Lumens	Item	Size	Selectable Power	Selectable 5 CCT	Lumens	Options
AL586449	2'	25w/20w/15w/10w	35K/4K/5K	3500/2800/2100/1400	AL586453	2'	25w/20w/15w/10w	3K/35K/4K/5K/57K	3500/2800/2100/1400	Blank White housing
AL586450	3'	35w/30w/25w/20w	35K/4K/5K	4900/4200/3500/2800	AL586454	3'	35w/30w/25w/20w	3K/35K/4K/5K/57K	4900/4200/3500/2800	B Black housing
AL586451	4'	40w/35w/30w/25w	35K/4K/5K	4900/4200/3500/2800	AL586454	4'	40w/35w/30w/25w	3K/35K/4K/5K/57K	4900/4200/3500/2800	MS Microwave Sensor
AL586452	8'	50w/45w/40w/35w	35K/4K/5K	5600/4900/4200/3500	AL586455	4'	50w/45w/40w/35w	3K/35K/4K/5K/57K	5600/4900/4200/3500	EM ER Battery 10w / 90min (KVD-KM-10w)
AL586452	8'	100w/90w/75w/60w	35K/4K/5K	14000/12600/10500/8400	AL586456	8'	100w/90w/75w/60w	3K/35K/4K/5K/57K	14000/12600/10500/8400	Accessories
AL586431	C2W	35w/30w/25w/20w	35K/4K/5K	4900/4200/3500/2800	AL586432	C2W	35w/30w/25w/20w	3K/35K/4K/5K/57K	4900/4200/3500/2800	AL586457 Suspension Mount Kit (cable 1.2m)
AL586431	C2W	40w/35w/30w/25w	35K/4K/5K	5600/4900/4200/3500	AL586432	C2W	40w/35w/30w/25w	3K/35K/4K/5K/57K	5600/4900/4200/3500	AL586459 Cuttable Plastic Cover (10m roll)
AL586469	90° L	35w/30w/25w/20w	35K/4K/5K	4900/4200/3500/2800	AL586473	90° L	35w/30w/25w/20w	3K/35K/4K/5K/57K	4900/4200/3500/2800	AL586460 Continuous Run Kit
AL586469	90° L	40w/35w/30w/25w	35K/4K/5K	5600/4900/4200/3500	AL586473	90° L	40w/35w/30w/25w	3K/35K/4K/5K/57K	5600/4900/4200/3500	AL586458 Frameless Recess Mount Kit
AL586470	120° L	35w/30w/25w/20w	35K/4K/5K	4900/4200/3500/2800	AL586474	120° L	35w/30w/25w/20w	3K/35K/4K/5K/57K	4900/4200/3500/2800	Kits needed:
AL586470	120° L	40w/35w/30w/25w	35K/4K/5K	5600/4900/4200/3500	AL586474	120° L	40w/35w/30w/25w	3K/35K/4K/5K/57K	5600/4900/4200/3500	2', 3', 4' = 1 Kit
AL586471	T	50w/45w/38w/30w	35K/4K/5K	7000/6300/5320/4200	AL586475	T	50w/45w/38w/30w	3K/35K/4K/5K/57K	7000/6300/5320/4200	8' = 2 Kits
AL586471	T	60w/55w/50w/45w	35K/4K/5K	8400/7700/7000/6300	AL586475	T	60w/55w/50w/45w	3K/35K/4K/5K/57K	8400/7700/7000/6300	L & V Shape = 2 Kits
AL586472	X	70w/60w/50w/40w	35K/4K/5K	9800/8400/7000/5600	AL586476	X	70w/60w/50w/40w	3K/35K/4K/5K/57K	9800/8400/7000/5600	T & Y Shape = 3 Kits
AL586472	X	80w/75w/70w/65w	35K/4K/5K	11200/10500/9800/9100	AL586476	X	80w/75w/70w/65w	3K/35K/4K/5K/57K	11200/10500/9800/9100	X Shape = 4 Kits
AL586478	V	35w/30w/25w/20w	35K/4K/5K	4900/4200/3500/2800	AL586479	V	35w/30w/25w/20w	3K/35K/4K/5K/57K	4900/4200/3500/2800	Recessed Mount Frame
AL586478	V	40w/35w/30w/25w	35K/4K/5K	5600/4900/4200/3500	AL586479	V	40w/35w/30w/25w	3K/35K/4K/5K/57K	5600/4900/4200/3500	AL586461 2'
AL586492	Y	50w/45w/38w/30w	35K/4K/5K	7000/6300/5320/4200	AL586499	Y	50w/45w/38w/30w	3K/35K/4K/5K/57K	7000/6300/5320/4200	AL586462 3'
AL586492	Y	60w/55w/50w/45w	35K/4K/5K	8400/7700/7000/6300	AL586499	Y	60w/55w/50w/45w	3K/35K/4K/5K/57K	8400/7700/7000/6300	AL586463 4'
AL586492	Y	60w/55w/50w/45w	35K/4K/5K	8400/7700/7000/6300	AL586499	Y	60w/55w/50w/45w	3K/35K/4K/5K/57K	8400/7700/7000/6300	AL586464 8'
AL586492	Y	60w/55w/50w/45w	35K/4K/5K	8400/7700/7000/6300	AL586499	Y	60w/55w/50w/45w	3K/35K/4K/5K/57K	8400/7700/7000/6300	Wall Mount Kit
AL586492	Y	60w/55w/50w/45w	35K/4K/5K	8400/7700/7000/6300	AL586499	Y	60w/55w/50w/45w	3K/35K/4K/5K/57K	8400/7700/7000/6300	AL586465 2'
AL586492	Y	60w/55w/50w/45w	35K/4K/5K	8400/7700/7000/6300	AL586499	Y	60w/55w/50w/45w	3K/35K/4K/5K/57K	8400/7700/7000/6300	AL586466 3'
AL586492	Y	60w/55w/50w/45w	35K/4K/5K	8400/7700/7000/6300	AL586499	Y	60w/55w/50w/45w	3K/35K/4K/5K/57K	8400/7700/7000/6300	AL586467 4'
AL586492	Y	60w/55w/50w/45w	35K/4K/5K	8400/7700/7000/6300	AL586499	Y	60w/55w/50w/45w	3K/35K/4K/5K/57K	8400/7700/7000/6300	AL586468 8'
AL586492	Y	60w/55w/50w/45w	35K/4K/5K	8400/7700/7000/6300	AL586499	Y	60w/55w/50w/45w	3K/35K/4K/5K/57K	8400/7700/7000/6300	Surface Mount Kit
AL586492	Y	60w/55w/50w/45w	35K/4K/5K	8400/7700/7000/6300	AL586499	Y	60w/55w/50w/45w	3K/35K/4K/5K/57K	8400/7700/7000/6300	AL586430 2' - 8'

Notes

- Lumen and Power Tolerance: ± 10%
- Lumens based on 57K/5K/4K
- 57K/5K/4K= 140lxw 35K=130lxw
- LED Chips: Bridgelux 2835
- Driver brand: Beauty Power LED driver
- L70 @ 72,000 hours
- L80:
- 20/25W > 49000hrs
- 30/35W > 49000hrs
- 40/50W > 46000hrs
- 80/100W > 45000hrs

- Housing Aluminum: 1mm thickness
- PC Frosted Lens: 1.2mm thickness
- Power cable Length: 1.2m long
- Surface mount: 4 pcs expansion tubes / self tapping screws included
- Recommended use: 15 hours / day
- To avoid product damage or voided warranty.
- 24/7 mode available. Please contact Americanlite for more details
- C2W = Ceiling to wall transition

- Conforms to UL STD. 1598
- Certified to CSA STD. C22.2 NO.250.0
- Continuous Run Kit: At least 1 x union
- "X" up to 4' "T" up to 3'
- "L" up to 2' "Y" up to 2'
- Linear up to 2'
- Different size and shape fixtures can be linked in one row, the maximum continuous run power is limited to 600W with one power cord
- Power up to 600W with one power cable
- 2=24pcs, 3=17pcs 4=12pcs, 8=6pcs
- No limit to mechanically link fixtures in one row.
- (do not exceed 6' of fixture per power cable)

- 4 Switches:
- Wattage Selection (4 positions)
- CCT Selection for up light (3 or 5 positions)
- CCT Selection for down light (3 or 5 positions)
- Light Distribution (5 positions)

Light Distribution options				
UP	100%	70%	50%	30%
Down	0%	30%	50%	100%

- EM Drivers
- 4' & 8' installed inside fixture
- 2' & 3' outside fixture

Packing Information

Model	CBIMaster	Pieces/ Carton	Carton (cm)	G.W. (KGS)
2'	0.0190	4	71 x 14.5 x 18.5	6.9
3'	0.0280	4	101 x 14.5 x 18.5	7.8
4'	0.0350	4	131 x 14.5 x 18.5	10.7
8'	0.0670	4	250 x 14.5 x 18.5	16.3

Model	CBIMaster	Pieces/ Carton	Carton (cm)	G.W. (KGS)
L 90° & C2W	0.0103	5	48 x 48 x 45	10
L 120° & C2W	0.1417	5	70 x 45 x 45	11
T	0.1880	5	87.5 x 48 x 45	13
X	0.3425	5	87.5 x 87 x 45	16.5
V	0.1008	5	56 x 40 x 45	10
Y	0.2395	5	75.5 x 70.5 x 45	14.5

Model	CBIMaster	Pieces/ Carton	Carton (cm)	G.W. (KGS)
Recessed Mount Frame 2'	0.0330	20	65 x 50.5 x 10	6.5
Recessed Mount Frame 3'	0.0480	20	95 x 50.5 x 10	8.6
Recessed Mount Frame 4'	0.0630	20	125 x 50.5 x 10	10
Recessed Mount Frame 8'	0.0630	10	125 x 50.5 x 10	10

Model	CBIMaster	Pieces/ Carton	Carton (cm)	G.W. (KGS)
Wall Mount Kit 2'	0.0250	10	62 x 47 x 8.5	5.5
Wall Mount Kit 3'	0.0360	10	91 x 47 x 8.5	7
Wall Mount Kit 4'	0.0490	10	122 x 47 x 8.5	8.5
Wall Mount Kit 8'	0.0490	5	122 x 47 x 8.5	8.5

Model	CBIMaster	Pieces/ Carton	Carton (cm)	G.W. (KGS)
Suspension Mount Kit	0.0420	30	65.5 x 27.5 x 23.5	17.5
Frameless Recess Mount Kit	0.0180	20	34 x 19 x 28	12
Cuttable Plastic Cover	0.0130	10	57 x 15.5 x 15.5	15
Continuous Run Kit	0.0320	40	66 x 33 x 15	9



Warranty

Americanlite® is pleased to provide up to a 5 year limited warranty covering the LED fixtures on this catalogue. Americanlite® warrants that the LED fixtures comply with Americanlite®'s published specifications and are free from defects in materials and workmanship.

All our equipment is CE, ETL or UL approved and manufactured with approved components. Americanlite® reserves the right to change or improve the design or components of any of its products due to parts availability or changes in standards, without assuming any obligation to modify any product previously manufactured and without notice. All equipment is tested and inspected before shipment.

This warranty is void if the product is operated outside of its normal operating conditions. The foregoing warranty does not apply to failures caused by acts of God or as a result of any abuse, misuse, abnormal use, or use in violation of any applicable standard, code or instructions for use in installations, including, but not limited to, those contained in the Standards for the International Electrotechnical Commission. Americanlite® reserves and has the right to examine failed fixtures to determine the cause of failure, excessive lumen depreciation and patterns of usage.